

# FLOS

03.9570.40 White

## Super Line Pro Down NEW


Designed by FLOS Architectural



Efficient and delicate luminaire featuring a high technological level. It is composed of a bar combining direct and indirect light and held by two transparent unipolar cables that provide support and electrical wiring. Perfect for offices or places that require high lighting efficiency and comfort. Collection of suspended luminaires for general lighting with a signature minimalist shape, designed to offer high-performance lighting, light quality and visual comfort combined in a very compact size.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

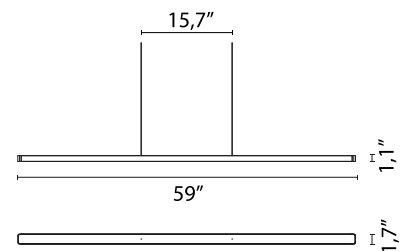

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Top LED             |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 38.7                |
| System power (W)       | 39                  |
| System flux (lm)       | 3801                |
| Efficacy (lm/W)        | 97.46               |

### Physical

|             |       |
|-------------|-------|
| Color       | White |
| Trim        | No    |
| Orientation | Fixed |
| IP internal | 20    |
| IP external | 20    |

### Download

|                       |                     |
|-----------------------|---------------------|
| Family spec sheet     | <a href="#">ZIP</a> |
| Mounting instructions | <a href="#">PDF</a> |

### Photometric Files


|           |                     |
|-----------|---------------------|
| LDT / IES | <a href="#">ZIP</a> |
|-----------|---------------------|

### Technical Drawings

|    |                     |
|----|---------------------|
| 2D | <a href="#">ZIP</a> |
| 3D | <a href="#">ZIP</a> |



## Schematic light drawing




## Photometric

|                          |                            |
|--------------------------|----------------------------|
| Lighting type            | Direct                     |
| Light distribution       | Symmetric                  |
| CCT (K)                  | 3000                       |
| CRI>                     | 90                         |
| McAdam steps (SDCM)      | 3                          |
| LED Life / Failure Ratio | L80B50 > 50.000h (Tc=85°C) |
| Beam angle C0-180 (°)    | 80                         |
| Beam angle C90-270 (°)   | 80                         |
| UGR <sub>L</sub>         | <19                        |

## Electrical

|                     |                                       |
|---------------------|---------------------------------------|
| Insulation class    | III                                   |
| Forward voltage (V) | 35.9                                  |
| LED current (mA)    | 1050                                  |
| Driver              | Remote                                |
| Dimmable            | Yes                                   |
| Dimming type        | Dimmable 0-10V                        |
| Dimming interface   | Remote Dimmable (Dimmer Not Included) |
| Emergency type      | No                                    |

## Ecodesign and Energy Labelling

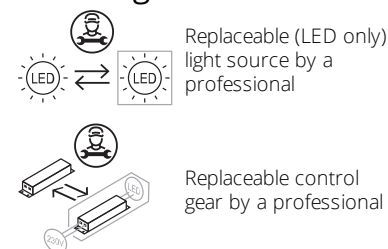

## Notes

UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4.25 m

Accessories & Power Supply



REQUIRED  
Accessory

08.0524.40.19  
Super Line Suspension Kit  
accessory for Remote installation,  
White




REQUIRED  
Accessory

08.0524.14.19  
Super Line Suspension Kit  
accessory for Remote installation,  
Black



REQUIRED  
Accessory

08.0524.02.19  
Super Line Suspension Kit  
accessory for Remote installation,  
Grey



REQUIRED  
Power supply

Electrical  
SP40W1050MA-10V-A02  
Remote Splice Box 9.5"x2.5"x1.5",  
1050mA , 40W, 0-10V Dimmable,  
120V/277V



REQUIRED  
Accessory

Installation

08.0524.ET.19  
Remote Suspension KIT



REQUIRED  
Accessory

Installation

08.0524.EU.19  
Remote Suspension KIT