

FLOS

03.9571.40 White

Super Line Pro Down NEW


Designed by FLOS Architectural



LED luminaire for general lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately, allowing the maximum brightness to be selected.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

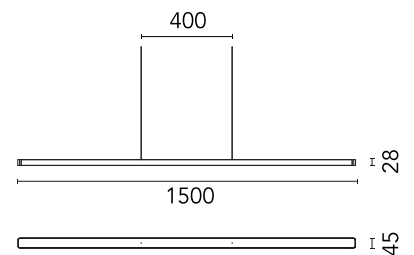

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	38.7
System power (W)	39
Lumen Output (lm)	3955
Efficacy (lm/W)	101.41

Physical

Colour	White
Trim	No
Orientation	Fixed
Length (mm)	1500
Net weight (kg)	1.45
IP internal	20
IP external	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)




Schematic light drawing



Beam Angle: 80°

h(m)	E(lx)	D(m)
1	2275	1.68
2	569	3.36
3	253	5.04
4	142	6.72
5	91	8.40

Ecodesign and Energy Labelling

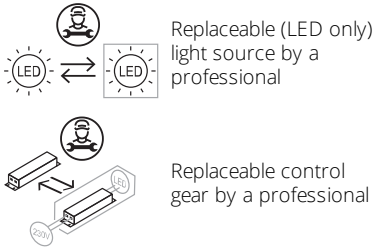

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50 > 50.000h (Tc=85°C)
Beam angle C0-180 (°)	80
Beam angle C90-270 (°)	80
UGR _L	<19


Electrical

Insulation class	III
Forward voltage (V)	35.9
LED current (mA)	1050
Power supply	Remote
Dimmable	Yes
Power supply type	Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Emergency	No

Notes

UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4.25 m

Accessories & Power Supply




REQUIRED
Accessory

Installation

08.9077.40

Interconnection Accessory




REQUIRED
Accessory

Installation

08.9077.02

Interconnection Accessory



REQUIRED
Accessory

Installation

08.9077.14

Interconnection Accessory



REQUIRED
Accessory

Installation

08.9077.ET

Interconnection Accessory



REQUIRED
Accessory

Installation

08.9077.EU

Interconnection Accessory



REQUIRED
Power supply

Electrical

08.0524.02

Remote Power Supply Kit 60W.
Non Dimmable



REQUIRED
Power supply

Electrical

08.0524.14

Remote Power Supply Kit 60W.
Non Dimmable



REQUIRED
Power supply

Electrical

08.0524.40

Remote Power Supply Kit 60W.
Non Dimmable



REQUIRED
Power supply
Electrical

08.0524.ET


Remote Power Supply Kit 60W.
Non Dimmable



REQUIRED
Power supply
Electrical

08.0524.EU


Remote Power Supply Kit 60W.
Non Dimmable



REQUIRED
Power supply
Electrical

08.0520.02A


Surface Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0520.14A


Surface Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0520.40A


Surface Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0520.ETA


Surface Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0520.EUA


Surface Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0522.02A


Recessed Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0522.14A


Recessed Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0522.40A


Recessed Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0522.ETA


Recessed Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0522.EUA


Recessed Kit 60W. Non Dimmable



REQUIRED
Power supply
Electrical

08.0521.EUA


Surface Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0521.ETA


Surface Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0521.40A


Surface Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0521.14A

Surface Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0521.02A


Surface Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0523.EUA


Recessed Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0523.ETA


Recessed Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0523.40A


Recessed Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0523.14A

Recessed Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0523.02A

Recessed Kit 60W. Dali Version



REQUIRED
Power supply
Electrical

08.0525.02A

Remote Power Supply Kit 60W.
Dali Version



REQUIRED
Power supply
Electrical

08.0525.14A

Remote Power Supply Kit 60W.
Dali Version



REQUIRED
Power supply
Electrical

08.0525.40A

Remote Power Supply Kit 60W.
Dali Version



REQUIRED
Power supply
Electrical

08.0525.ETA

Remote Power Supply Kit 60W.
Dali Version



REQUIRED
Power supply
Electrical

08.0525.EUA

Remote Power Supply Kit 60W.
Dali Version