

FLOS

03.9571.40 White

Super Line Pro Down NEW


Designed by FLOS Architectural



Efficient and delicate luminaire featuring a high technological level. It is composed of a bar combining direct and indirect light and held by two transparent unipolar cables that provide support and electrical wiring. Perfect for offices or places that require high lighting efficiency and comfort. Collection of suspended luminaires for general lighting with a signature minimalist shape, designed to offer high-performance lighting, light quality and visual comfort combined in a very compact size.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

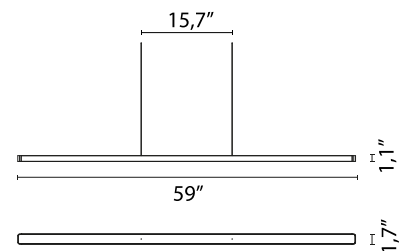

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	38.7
System power (W)	39
System flux (lm)	3955
Efficacy (lm/W)	101.41

Physical

Color	White
Trim	No
Orientation	Fixed
IP internal	20
IP external	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF

Photometric Files


LDT / IES	ZIP
-----------	---------------------

Technical Drawings

2D	ZIP
3D	ZIP



Schematic light drawing




Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50 > 50.000h (Tc=85°C)
Beam angle C0-180 (°)	80
Beam angle C90-270 (°)	80
UGR _L	<19


Electrical

Insulation class	III
Forward voltage (V)	35.9
LED current (mA)	1050
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Emergency type	No

Ecodesign and Energy Labelling



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

Notes

UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4.25 m

Accessories & Power Supply



REQUIRED
Accessory

08.0524.40.19
Super Line Suspension Kit
accessory for Remote installation,
White




REQUIRED
Accessory

08.0524.14.19
Super Line Suspension Kit
accessory for Remote installation,
Black



REQUIRED
Accessory

08.0524.02.19
Super Line Suspension Kit
accessory for Remote installation,
Grey



REQUIRED
Power supply

Electrical
SP40W1050MA-10V-A02
Remote Splice Box 9.5"x2.5"x1.5",
1050mA , 40W, 0-10V Dimmable,
120V/277V



REQUIRED
Accessory

Installation

08.0524.ET.19
Remote Suspension KIT



REQUIRED
Accessory

Installation

08.0524.EU.19
Remote Suspension KIT