

# FLOS

03.9571.ET Brushed Brass

## Super Line Pro Down NEW


Designed by FLOS Architectural



LED luminaire for general lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately, allowing the maximum brightness to be selected.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

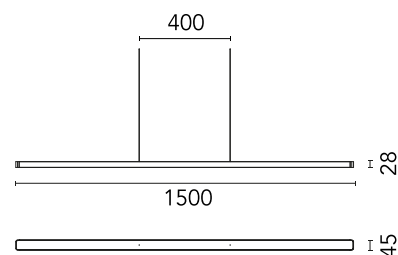

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Top LED             |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 38.7                |
| System power (W)       | 39                  |
| Lumen Output (lm)      | 3955                |
| Efficacy (lm/W)        | 101.41              |

### Physical

|                 |               |
|-----------------|---------------|
| Colour          | Brushed Brass |
| Orientation     | Fixed         |
| Length (mm)     | 1500          |
| Net weight (kg) | 1.45          |
| IP internal     | 20            |
| IP external     | 20            |

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ ZIP](#)

### Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)



## Schematic light drawing



## Ecodesign and Energy Labelling



## Photometric

|                          |                             |
|--------------------------|-----------------------------|
| Lighting type            | Direct                      |
| Light distribution       | Symmetric                   |
| CCT (K)                  | 4000                        |
| CRI>                     | 90                          |
| McAdam steps (SDCM)      | 3                           |
| LED Life / Failure Ratio | L80B50 - 50.0000h (Tc 85°C) |
| Beam angle C0-180 (°)    | 80                          |
| Beam angle C90-270 (°)   | 80                          |
| Extreme cut off          | No                          |
| UGR <sub>L</sub>         | <19                         |


## Electrical

|                     |                                       |
|---------------------|---------------------------------------|
| Insulation class    | III                                   |
| Forward voltage (V) | 35.9                                  |
| LED current (mA)    | 1050                                  |
| Power supply        | Remote                                |
| Dimmable            | Yes                                   |
| Power supply type   | Dimmable 0-10V                        |
| Dimming interface   | Remote Dimmable (Dimmer Not Included) |

## Notes

UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4.25 m

Accessories & Power Supply




REQUIRED  
Accessory

Installation

08.9077.40

Interconnection Accessory




REQUIRED  
Accessory

Installation

08.9077.02

Interconnection Accessory



REQUIRED  
Accessory

Installation

08.9077.14

Interconnection Accessory



REQUIRED  
Accessory

Installation

08.9077.ET

Interconnection Accessory



REQUIRED  
Accessory

Installation

08.9077.EU

Interconnection Accessory



REQUIRED  
Power supply

Electrical

08.0524.02

Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply

Electrical

08.0524.14

Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply

Electrical

08.0524.40

Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0524.ET


Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0524.EU


Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0520.02A


Surface Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0520.14A


Surface Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0520.40A


Surface Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0520.ETA


Surface Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0520.EUA


Surface Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0522.02A


Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0522.14A


Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0522.40A


Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0522.ETA


Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0522.EUA


Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0521.EUA


Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0521.ETA


Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0521.40A


Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0521.14A

Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0521.02A


Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.EUA


Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.ETA


Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.40A


Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.14A

Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.02A

Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0525.02A

Remote Power Supply Kit 60W.  
Dali Version



REQUIRED  
Power supply  
Electrical

08.0525.14A

Remote Power Supply Kit 60W.  
Dali Version



REQUIRED  
Power supply

Electrical

08.0525.40A

Remote Power Supply Kit 60W.

Dali Version



REQUIRED  
Power supply

Electrical

08.0525.ETA

Remote Power Supply Kit 60W.

Dali Version



REQUIRED  
Power supply

Electrical

08.0525.EUA

Remote Power Supply Kit 60W.

Dali Version