

Super Line Pro Up&Down

NEW


Designed by FLOS Architectural



Super Line PRO is a collection of suspended luminaires for general lighting with minimalist profile, designed to offer high performance and light quality without sacrificing visual comfort. The product is designed to meet all requirements to reduce glare and improve visual comfort in offices, complying with the most restrictive conditions. A UGR<16 and a maximum intensity value less than 3000 cd at an angle of 65° guarantee the best conditions for workplaces and make it perfect for many other applications.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

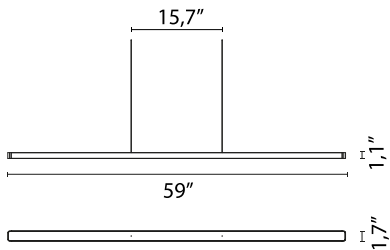

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	58
System power (W)	60
System flux (lm)	6314
Efficacy (lm/W)	105.23

Physical

Color	Brushed Rose Gold
Orientation	Fixed
IP internal	20
IP external	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF

Photometric Files


LDT / IES	ZIP
-----------	-----

Technical Drawings

2D	ZIP
3D	ZIP




Schematic light drawing



Beam Angle:	80°	
h(m)	E(lx)	D(m)
1	1513	1.68
2	378	3.35
3	168	5.03
4	95	6.71
5	61	8.38

Luminous flux luminaire
5838 lm

Ecodesign and Energy Labelling

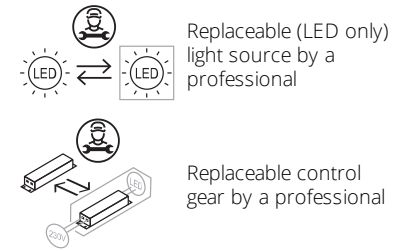

Photometric

Lighting type	Indirect, Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50 - 50.0000h (Tc 85°C)
Beam angle C0-180 (°)	80
Beam angle C90-270 (°)	80
Beam angle indirect C0-180 (°)	110
Beam angle indirect C90-270 (°)	110
Extreme cut off	No
UGR _L	<19

Electrical

Insulation class	III
Forward voltage (V)	69
LED current (mA)	600
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4.25 m

Accessories & Power Supply



REQUIRED
Accessory

08.0642.14.19
Super Line Pro Suspension Kit
accessory (with power cable) for
Remote installation, Black




REQUIRED
Accessory

08.0642.40.19
Super Line Pro Suspension Kit
accessory (with power cable) for
Remote installation, White




REQUIRED
Accessory

08.0642.02.19
Super Line Pro Suspension Kit
accessory (with power cable) for
Remote installation, Grey



REQUIRED
Power supply

Electrical
SP40W1050MA-10V-A02
Remote Splice Box 9.5"x2.5"x1.5",
1050mA , 40W, 0-10V Dimmable,
120V/277V



REQUIRED
Power supply

Electrical
SP40W600MA-10V-A01
Splice Box UL 7"x3-5/8"x1-1/4",
600mA , 40W, 0-10V Dimmable,
120/277V



REQUIRED
Accessory

Installation
08.0642.ET.19
Remote Suspension KIT



REQUIRED
Accessory

Installation
08.0642.EU.19
Remote Suspension KIT