

Super Line Pro Up&Down

NEW


Designed by FLOS Architectural



LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately. Greater Up or Down intensity can be selected using power kits with a device with two independent outputs.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

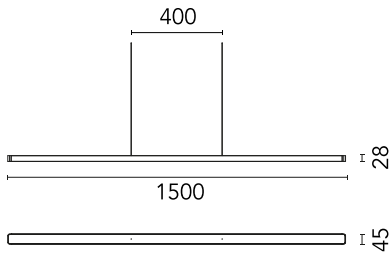

## Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Top LED             |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 58                  |
| System power (W)       | 60                  |
| Lumen Output (lm)      | 6172                |
| Efficacy (lm/W)        | 102.87              |

## Physical

|                 |       |
|-----------------|-------|
| Colour          | White |
| Trim            | No    |
| Orientation     | Fixed |
| Length (mm)     | 1500  |
| Net weight (kg) | 1.45  |
| IP internal     | 20    |
| IP external     | 20    |

## Download

Mounting instructions  PDF

## Photometric Files

LDT / IES  ZIP

## Technical Drawings


2D  ZIP

3D  ZIP


 Bim  ZIP



## Ecodesign and Energy Labelling

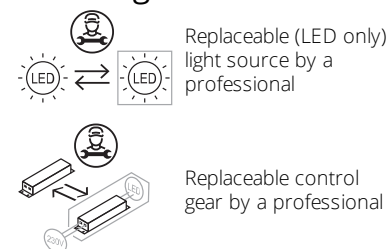

## Schematic light drawing



## Photometric

|                                 |                            |
|---------------------------------|----------------------------|
| Lighting type                   | Indirect, Direct           |
| Light distribution              | Symmetric                  |
| CCT (K)                         | 4000                       |
| CRI>                            | 90                         |
| McAdam steps (SDCM)             | 3                          |
| LED Life / Failure Ratio        | L80B50 > 50.000h (Tc=85°C) |
| Beam angle C0-180 (°)           | 80                         |
| Beam angle C90-270 (°)          | 80                         |
| Beam angle indirect C0-180 (°)  | 110                        |
| Beam angle indirect C90-270 (°) | 110                        |
| UGR <sub>L</sub>                | <19                        |

## Electrical

|                     |                                       |
|---------------------|---------------------------------------|
| Insulation class    | III                                   |
| Forward voltage (V) | 55.8                                  |
| LED current (mA)    | 600                                   |
| Power supply        | Remote                                |
| Dimmable            | Yes                                   |
| Power supply type   | Dimmable 0-10V                        |
| Dimming interface   | Remote Dimmable (Dimmer Not Included) |
| Emergency           | No                                    |

## Notes

UGR<19 & cd/m2 @ 65°<3000 workplace optimised. Cable 4.25 m

Accessories & Power Supply




REQUIRED  
Accessory

Installation

08.9077.40

Interconnection Accessory




REQUIRED  
Accessory

Installation

08.9077.02

Interconnection Accessory



REQUIRED  
Accessory

Installation

08.9077.14

Interconnection Accessory




REQUIRED  
Accessory

Installation

08.9077.ET

Interconnection Accessory




REQUIRED  
Accessory

Installation

08.9077.EU

Interconnection Accessory




REQUIRED  
Power supply

Electrical

08.0640.02

Surface Kit. Non Dimmable/Dali  
Version




REQUIRED  
Power supply

Electrical

08.0640.14

Surface Kit. Non Dimmable/Dali  
Version




REQUIRED  
Power supply

Electrical


08.0640.40

Surface Kit. Non Dimmable/Dali  
Version




REQUIRED  
Power supply  
Electrical

08.0641.02  
Remote Power Supply Kit. Non  
Dimmable/Dali Version



REQUIRED  
Power supply  
Electrical

08.0641.14  
Remote Power Supply Kit. Non  
Dimmable/Dali Version



REQUIRED  
Power supply  
Electrical

08.0641.40  
Remote Power Supply Kit. Non  
Dimmable/Dali Version



REQUIRED  
Power supply  
Electrical

08.0642.02  
Remote Power Supply Kit. Non  
Dimmable/Dali Version




REQUIRED  
Power supply  
Electrical

08.0642.14  
Remote Power Supply Kit. Non  
Dimmable/Dali Version




REQUIRED  
Power supply  
Electrical

08.0642.40  
Remote Power Supply Kit. Non  
Dimmable/Dali Version




REQUIRED  
Power supply  
Electrical

08.0640.ET  
Surface Kit. Non Dimmable/Dali  
Version



REQUIRED  
Power supply  
Electrical

08.0640.EU  
Surface Kit. Non Dimmable/Dali  
Version



REQUIRED  
Power supply  
Electrical

08.0641.ET

Remote Power Supply Kit. Non  
Dimmable/Dali Version



REQUIRED  
Power supply  
Electrical

08.0641.EU

Remote Power Supply Kit. Non  
Dimmable/Dali Version



REQUIRED  
Power supply  
Electrical

08.0642.ET

Remote Power Supply Kit. Non  
Dimmable/Dali Version



REQUIRED  
Power supply  
Electrical

08.0642.EU

Remote Power Supply Kit. Non  
Dimmable/Dali Version