


## Super Line Up&Down Indirect

Designed by FLOS Architectural, 2017



Efficient and delicate luminaire featuring a high technological level. It is composed of a bar combining direct and indirect light and held by two transparent unipolar cables that provide support and electrical wiring. Perfect for offices or places that require high lighting efficiency and comfort. Collection of uspended luminaries for general lighting with a signature minimalist shape, designed to offer high-performance lighting, light quality and visual comfort combined in a very compact size.

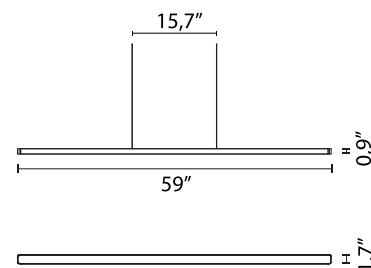

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	58
System power (W)	60
Source flux (lm)	6820
System flux (lm)	4914
Efficacy (lm/W)	81.9

### Physical

Color	Grey
Trim	No
Orientation	Fixed
IP internal	20
IP external	20

### Download

Family spec sheet	<a href="#">ZIP</a>
Mounting instructions	<a href="#">PDF</a>

### Photometric Files


LDT / IES	<a href="#">ZIP</a>
-----------	---------------------

### Technical Drawings

2D	<a href="#">ZIP</a>
3D	<a href="#">ZIP</a>



Schematic light drawing



### Ecodesign and Energy Labelling

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Photometric

Lighting type	Indirect, Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
LED Life / Failure Ratio	L80B50 > 50.000h (Tc=85°C)
Beam angle C0-180 (°)	100
Beam angle C90-270 (°)	100
UGR <sub>L</sub>	<19

Electrical

Insulation class	III
Forward voltage (V)	55.8
LED current (mA)	1050
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)
Emergency type	No

Notes

Cable 4.25 m

Accessories & Power Supply



REQUIRED  
Accessory

08.0524.40.19  
Super Line Suspension Kit  
accessory for Remote installation,  
White




REQUIRED  
Accessory

08.0524.14.19  
Super Line Suspension Kit  
accessory for Remote installation,  
Black



REQUIRED  
Accessory

08.0524.02.19  
Super Line Suspension Kit  
accessory for Remote installation,  
Grey



REQUIRED  
Power supply

SP60W1050MA-10V-E01  
Splice Box9.5"x2.5"x1.5",  
1050mA , 60W, 0-10V ,  
Dimmable, 120V/277V



REQUIRED  
Accessory

Installation  
08.0524.ET.19  
Remote Suspension KIT



REQUIRED  
Accessory

Installation  
08.0524.EU.19  
Remote Suspension KIT