


# FLOS

03.9503.EU Brushed Rose Gold

## Super Line Up&Down Indirect NEW


Designed by FLOS Architectural

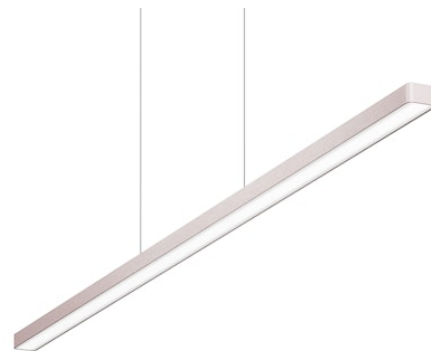

LED luminaire for direct and indirect lighting with a signature minimalist and compact design, to be installed on ceilings by means of suspension. Power source included in installation kits must be ordered separately.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

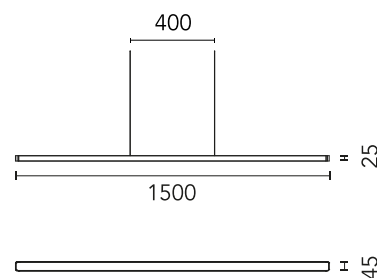

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Top LED             |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 58                  |
| System power (W)       | 60                  |
| Source flux (lm)       | 7255                |
| Lumen Output (lm)      | 5225                |
| Efficacy (lm/W)        | 87.08               |

### Physical

|                 |                   |
|-----------------|-------------------|
| Colour          | Brushed Rose Gold |
| Orientation     | Fixed             |
| Length (mm)     | 1500              |
| Net weight (kg) | 1.45              |
| IP internal     | 20                |
| IP external     | 20                |

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files

LDT / IES [↓ ZIP](#)

### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)



<https://professional.flos.com/en/global/product/super-line-updown-indirect-03.9503.eu/>


03.9503.EU

©2022 Flos - P.IVA 00290820174 - 9/12/2025

[professional.flos.com](https://professional.flos.com) | [info@flos.com](mailto:info@flos.com) 1/7

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

## Schematic light drawing



Beam Angle: 100°

|   | h(m) | E(lx) | D(m) |
|---|------|-------|------|
| 1 | 1307 | 2.39  |      |
| 2 | 327  | 4.78  |      |
| 3 | 145  | 7.17  |      |
| 4 | 82   | 9.57  |      |
| 5 | 52   | 11.96 |      |


## Photometric

|                                 |                             |
|---------------------------------|-----------------------------|
| Lighting type                   | Indirect, Direct            |
| Light distribution              | Symmetric                   |
| CCT (K)                         | 4000                        |
| CRI>                            | 90                          |
| McAdam steps (SDCM)             | 3                           |
| LED Life / Failure Ratio        | L80B50 - 50.0000h (Tc 85°C) |
| Beam angle C0-180 (°)           | 100                         |
| Beam angle C90-270 (°)          | 100                         |
| Beam angle indirect C0-180 (°)  | 110                         |
| Beam angle indirect C90-270 (°) | 110                         |
| Extreme cut off                 | No                          |

## Notes

Cable 4.25 m


## Ecodesign and Energy Labelling

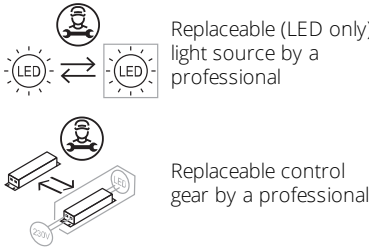

## Electrical

|                     |                                       |
|---------------------|---------------------------------------|
| Insulation class    | III                                   |
| Forward voltage (V) | 55.8                                  |
| LED current (mA)    | 1050                                  |
| Power supply        | Remote                                |
| Dimmable            | Yes                                   |
| Power supply type   | Dimmable 0-10V                        |
| Dimming interface   | Remote Dimmable (Dimmer Not Included) |

Accessories & Power Supply




REQUIRED  
Accessory

Installation

08.9076.40

Interconnection Accessory




REQUIRED  
Accessory

Installation

08.9076.02

Interconnection Accessory




REQUIRED  
Accessory

Installation

08.9076.14

Interconnection Accessory




REQUIRED  
Accessory

Installation

08.9076.ET

Interconnection Accessory



REQUIRED  
Accessory

Installation

08.9076.EU

Interconnection Accessory



REQUIRED  
Power supply

Electrical

08.0524.02

Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply

Electrical

08.0524.14

Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply

Electrical

08.0524.40

Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0524.ET


Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0524.EU


Remote Power Supply Kit 60W.  
Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0520.02A


Surface Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0520.14A


Surface Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0520.40A


Surface Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0520.ETA


Surface Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0520.EUA


Surface Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0522.02A


Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0522.14A


Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0522.40A

Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0522.ETA


Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0522.EUA


Recessed Kit 60W. Non Dimmable



REQUIRED  
Power supply  
Electrical

08.0521.EUA


Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0521.ETA


Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0521.40A


Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0521.14A

Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0521.02A


Surface Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.EUA


Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.ETA


Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.40A


Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.14A

Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0523.02A

Recessed Kit 60W. Dali Version



REQUIRED  
Power supply  
Electrical

08.0525.02A

Remote Power Supply Kit 60W.  
Dali Version



REQUIRED  
Power supply  
Electrical

08.0525.14A

Remote Power Supply Kit 60W.  
Dali Version



REQUIRED  
Power supply  
Electrical

08.0525.40A

Remote Power Supply Kit 60W.  
Dali Version



REQUIRED  
Power supply  
Electrical

08.0525.ETA

Remote Power Supply Kit 60W.  
Dali Version



REQUIRED  
Power supply  
Electrical

08.0525.EUA

Remote Power Supply Kit 60W.  
Dali Version