

FLOS

F6630009 White

Superloon

Designed by Jasper Morrison, 2015


48W - 2716lm - 2200-2800K



Adjustable floor lamp providing direct light. Painted or chrome-plated aluminium body with metal spinning head, die-cast joints and extruded stem. Silk screened PMMA diffuser. Edge Lighting technology light source. Optical switch sensor placed on the stem that provide Warm Tone dimming function. Power cord length 250 cm. Plug-in power supply with interchangeable plugs.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

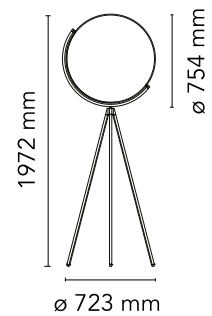

Main specifications

| | |
|------------------------|---------------------|
| Mounting | Floor |
| Environments | Indoor dry location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | LED Module |
| Power (W) | 48 |
| System flux (lm) | 2716 |

Physical

| | |
|---------------------|-------|
| Colour | White |
| Length (mm) | 754 |
| Cord colour | Black |
| Net weight (kg) | 11 |
| Package volume (m3) | 0.11 |
| IP internal | 20 |

Download

[Mounting instructions](#) PDF

[Mounting instructions](#) PDF

Photometric Files

[LDT / IES](#) LDT


Technical Drawings

[2D](#) ZIP

[3D](#) ZIP



Schematic light drawing



Photometric

| | |
|--------------------|----------------|
| Lighting type | Direct |
| Light distribution | Roto symmetric |
| CCT (K) | 2200-2800 |
| Extreme cut off | No |

Electrical

| | |
|--------------------|------------------------|
| Insulation class | III |
| Frequency (Hz) | 50/60 |
| Main voltage (Vac) | 100-240 |
| Power supply | Remote included |
| Dimmable | Yes |
| Power supply type | Electronic 48V |
| Dimming interface | Dimmer Integrated |
| Plug type | Type G, Type A, Type C |
| Batteries inside | No |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

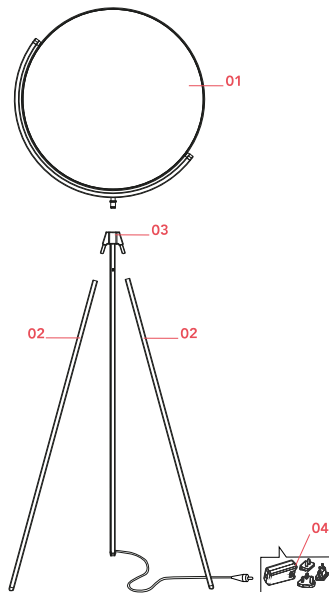

- | | | |
|-----|--------------------------------------|-----------|
| 01. | White diffuser | F6632009 |
| 02. | Mobile legs | RF25184 |
| 04. | Black plug assembly kit & 48V driver | RF6600130 |



F6632009
White diffuser



RF25184
Mobile legs



RF6600130
Black plug assembly kit & 48V
driver