

FLOS

F6630009 White

Superloon

Designed by Jasper Morrison, 2015


48W - 2716lm - 2200-2800K



Adjustable floor lamp providing direct light. Painted or chrome-plated aluminium body with metal spinning head, die-cast joints and extruded stem. Silk screened PMMA diffuser. Edge Lighting technology light source. Optical switch sensor placed on the stem that provide Warm Tone dimming function. Power cord length 250 cm. Plug-in power supply with interchangeable plugs.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

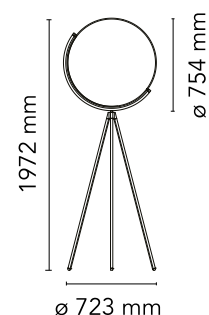

Main specifications

Mounting	Floor
Environments	Indoor dry location
Light Source Type	LED
LED type	LED Module
Power (W)	48
System flux (lm)	2716

Physical

Colour	White
Length (mm)	754
Net weight (kg)	11
Package volume (m3)	0.11
IP internal	20

Download


Mounting instructions	PDF
Mounting instructions	PDF
Spare Parts	PDF

Photometric Files


LDT / IES	LDT
---------------------------	-----

Technical Drawings

2D	ZIP
3D	ZIP

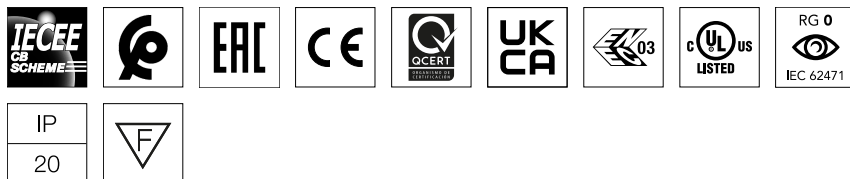

Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Roto symmetric
CCT (K)	2200-2800
Extreme cut off	No

Electrical


Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240/48
LED voltage Vf (Vdc)	null
Power Supply	Remote included
Dimmable	Yes
Power Supply Type	Electronic 48V
Dimming interface	Dimmer Integrated
Plug type	Type G, Type A, Type C
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class D




Replaceable (LED only)
light source by a
professional



Replaceable control
gear by an end-user

Spare Parts

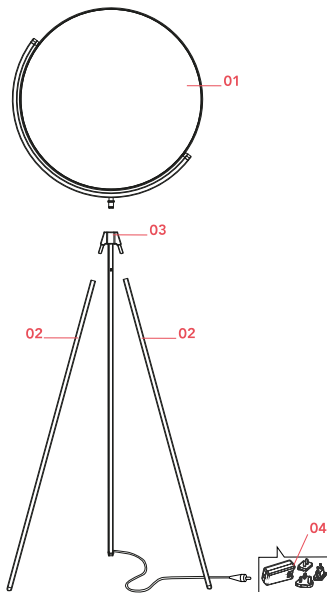

- | | | |
|-----|--------------------------------------|-----------|
| 00. | Assembly Coaxial Connector | RF3390130 |
| 01. | White diffuser | F6632009 |
| 02. | Mobile legs | RF25184 |
| 03. | Electrified fixed legs | RF6630109 |
| 04. | Black plug assembly kit & 48V driver | RF6600130 |

DOWNLOAD



RF3390130

Assembly Coaxial Connector



F6632009

White diffuser




RF25184

Mobile legs



RF6630109

Electrified fixed legs



RF6600130

Black plug assembly kit & 48V driver