


Surface power supply for direct and indirect lighting with housing for the driver

24V/185W equipment included. Cables not included.

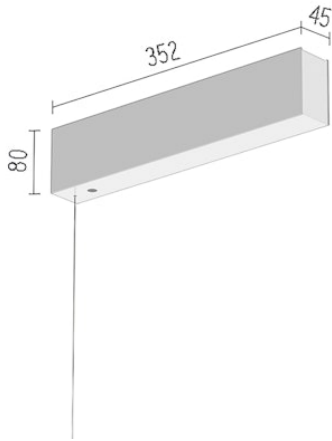

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Download

Family spec sheet

ZIP

Mounting instructions

PDF

Main specifications

Mounting	Ceiling surface
Environments	Indoor dry location
Power (W)	185

Physical

Color	White
Trim	No
Length (in)	13.85
Net weight (lb)	4.51
IP internal	20
IP external	20



Electrical

Frequency (Hz)	50/60
Alternating current voltage (Vac)	100240
Driver	Integrated