

FLOS

03.8141.40ACB White/White

Suspension Panel 600 Rod 400 mm Casambi integrated **UPGRADE**

Designed by Vincent Van Duysen, 2020



Suspended luminaire with rigid rod, to be installed in the Infra-Structure system.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	40
System power (W)	40

Physical

Colour	White/White
Trim	No
Orientation	Fixed
Length (mm)	605
Net weight (kg)	5.16
IP internal	20



Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)


Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)

Schematic light drawing



Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	113
Beam angle C90-270 (°)	113
Extreme cut off	No

Electrical

Insulation class	III
Forward voltage (V)	48
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Dimmable Casambi
Dimming interface	Remote Dimmable (Dimmer Not Included)

Ecodesign and Energy

Labelling

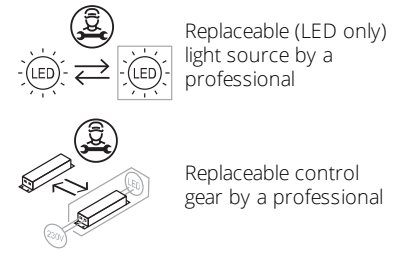

Notes

The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® by Casambi.