

# FLOS


FA523052 Opal

## Tau Opal L 1054 NEW

Designed by FLOS Outdoor



LED light source included. Screw connector at the tube's end. 24V dc remote electric power supply and individual or series feeding cables, to be ordered separately. Adjustable light intensity. Opal polycarbonate diffuser. Adjustable light intensity.

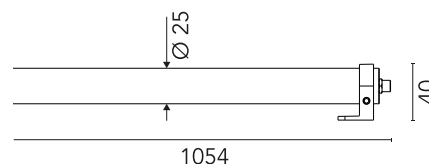

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                   |                      |
|-------------------|----------------------|
| EAN               | 8054793640372        |
| Mounting          | Ceiling, Wall        |
| Environments      | Outdoor wet location |
| LED type          | Power LED            |
| Power (W)         | 10                   |
| System power (W)  | 10                   |
| Source flux (lm)  | 840                  |
| Lumen Output (lm) | 393                  |

### Physical

|                     |       |
|---------------------|-------|
| Colour              | Opal  |
| Orientation         | Fixed |
| Net weight (kg)     | 0.63  |
| Package height (mm) | 1190  |
| Package width (mm)  | 73    |
| Package length (mm) | 73    |
| Package volume (m3) | 0.01  |
| IP internal         | 65    |

### Download

Mounting instructions [ZIP](#)

### Photometric Files


LDT / IES [ZIP](#)

### Technical Drawings

2D [ZIP](#)

3D [ZIP](#)

### Schematic light drawing



### Ecodesign and Energy Labelling

 Replaceable (LED only)  
light source by a  
professional

Photometric

|                        |           |
|------------------------|-----------|
| Light distribution     | Symmetric |
| CCT (K)                | 4000      |
| CRI>                   | 80        |
| Beam angle C0-180 (°)  | 100       |
| Beam angle C90-270 (°) | 110       |
| Extreme cut off        | No        |

Electrical

|                    |                                                     |
|--------------------|-----------------------------------------------------|
| Insulation class   | III                                                 |
| Main voltage (Vac) | 24                                                  |
| Power supply       | Remote excluded                                     |
| Power supply type  | Non Dimmable,<br>Dimmable 1-10V,<br>Dimmable DALI 1 |
| Emergency          | No                                                  |

Notes

Please check with your referent person in our Front Office if a code modification is needed to meet the required certification compliance

Accessories & Power Supply



REQUIRED  
Accessory

FA172  
Supply Cable Tau Tube L 2000  
mm Single Connector



OPTIONAL  
Power supply  
RF25752  
Power supply 24Vdc 20W / 220-  
240V IP67 Class II selv. Non  
Dimmable



OPTIONAL  
Power supply  
F990B27A000  
Power supply 24Vdc 70W / 220-  
240V IP67 Class I selv. Non  
Dimmable



OPTIONAL  
Power supply  
RF25750  
Power supply 24Vdc 17W / 110-  
240V (15W@110V) IP20 Class II  
selv. Dimmable Push-Dimm Or  
1.10V



OPTIONAL  
Accessory  
FA173  
Supply Cable Tau Tube L 80 mm  
Double Connector



OPTIONAL  
Accessory  
FA174  
Supply Cable Tau Tube L 200 mm  
Double Connector



OPTIONAL  
Power supply  
F990B28A000  
Power supply 24Vdc 50W / 220-  
240V IP67 Class I selv. Non  
Dimmable



OPTIONAL  
Power supply  
F990B29A000  
Power supply 24Vdc 100W /  
220-240V IP67 Class I selv. Non  
Dimmable



## OPTIONAL Power supply

F990B21A000

Power supply 17W/110÷240V  
-24Vdc (15W@110V) IP67 Class  
II Selv, Dimmable Push-Dimm Or  
1.10V