


The Fast Track Surface Profile

Designed by FLOS Architectural, 2017




Length: 2000 - Ceiling surface

Electro-mechanical profile for surface installations in plasterboard ceilings, with 1m to 3m lengths. Not suitable for suspended installations. Power and interconnection cables must be ordered separately. Covers must be ordered separately. Fixed ceiling kit included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

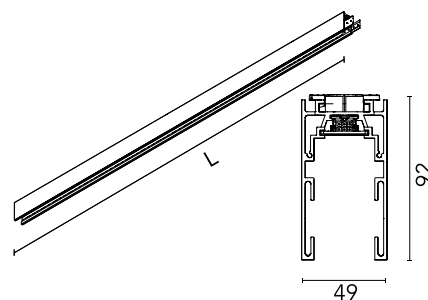

Main specifications

Mounting	Ceiling surface
Environments	Indoor dry location

Physical

Colour	Black
Trim	No
Length (mm)	2000
Net weight (kg)	5.6

Download

Mounting instructions	ZIP
Item information	JPG



Electrical

Forward voltage (V)	48
Power supply	Remote excluded
Emergency	No

Accessories & Power Supply



REQUIRED
Power supply
Electrical

60.8919
LED Power Supply Source for
remote installation. 48V/320W.
100/240 Vac



REQUIRED
Power supply
Electrical

60.9170
LED power supply source for
remote installation, 48V/120W.
220/240 Vac



REQUIRED
Power supply
Electrical

60.9607
LED power supply source for
remote installation, 110Vac-150W
/ 220Vac-200W



REQUIRED
Component
06.0303.00

Power feed cable




REQUIRED
Component
08.9071.14

The Fast Track Surface Profiles
End Caps. 2 unit kit



REQUIRED
Component
08.9071.40

The Fast Track Surface Profiles
End Caps. 2 unit kit



OPTIONAL
Component
06.0301.00

Connection cable. Electrical and
data connection



OPTIONAL
Component
08.9074.14

The Fast Track Recessed-Surface
Stopper



OPTIONAL

Electrical

06.1987.14

Multifunction Smart Device for
Running Magnet & Fast Track



OPTIONAL

Electrical

06.1987.40

Multifunction Smart Device for
Running Magnet & Fast Track