

## The Fast Track Surface Profile

Designed by FLOS Architectural, 2017




Length: 78.74 - Ceiling surface

Electro-mechanical profile for surface installations in plasterboard ceilings, with 1m to 3m lengths. Not suitable for suspended installations. Power and interconnection cables must be ordered separately. Covers must be ordered separately. Fixed ceiling kit included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

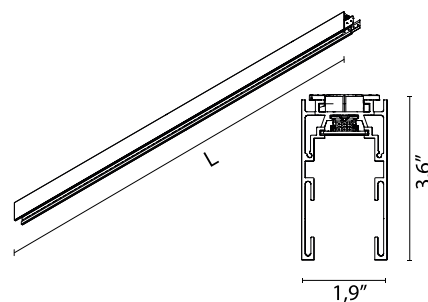

### Main specifications

Mounting	Ceiling surface
Environments	Indoor dry location

### Physical

Color	White
Trim	No
Length (in)	78.74
Net weight (lb)	12.35

### Download

Family spec sheet	<a href="#">ZIP</a>
Mounting instructions	<a href="#">ZIP</a>
Item information	<a href="#">JPG</a>



### Electrical

Forward voltage (V)	48
Driver	Remote excluded
Emergency type	No

Accessories & Power Supply



REQUIRED  
Component

06.0303.00

Power feed cable



REQUIRED  
Component

08.9071.14


The Fast Track Surface Profiles  
End Caps. 2 unit kit



REQUIRED  
Component

08.9071.40

The Fast Track Surface Profiles  
End Caps. 2 unit kit



OPTIONAL  
Component

06.0301.00

Connection cable. Electrical and  
data connection



OPTIONAL  
Component

08.9074.14

The Fast Track Recessed-Surface  
Stopper