


FLOS

06.6000.14 Black

The Micro Running Magnet Recessed Profile NEW


Designed by FLOS Architectural, 2020

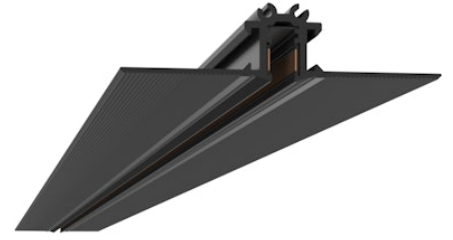

Electromechanical profile of reduced size for recessed installation in plasterboard ceilings/walls with lengths from 1 to 3 m.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

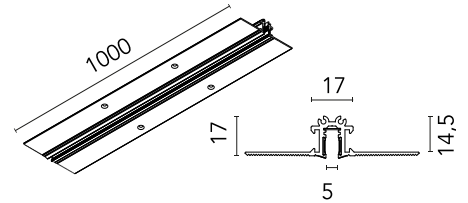

Main specifications

| | |
|--------------|---------------------|
| Mounting | Recessed |
| Environments | Indoor dry location |
| Power (W) | MAX 120 |

Physical

| | |
|-----------------|-------|
| Colour | Black |
| Length (mm) | 1000 |
| Net weight (kg) | 0.48 |

Download

[Mounting instructions](#)



Electrical

| | |
|----------------------|--|
| Insulation class | III |
| Forward voltage (V) | 24 |
| LED voltage Vf (Vdc) | 24 |
| Driver | Remote excluded |
| Dimmable | Yes |
| Dimming type | Non Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1 |
| Dimming interface | Remote Dimmable (Dimmer Not Included) |

Notes

Fastening accessories included with the profiles. 90° corners available in the same plane (symmetrical element for left and right corners).

PWM voltage output dimmable drivers shall be used at frequencies between 250 and 500Hz.

Accessories & Power Supply



REQUIRED
Power supply

Electrical

60.9359
24V Remote power supply. 25W
110/240V



REQUIRED
Power supply

Electrical

60.9360
24V Remote power supply. 36W-
110V / 45W-240V



REQUIRED
Power supply

Electrical

60.9361
24V Remote power supply. 57W
220/240V



REQUIRED
Power supply

60.9516

Remote Power Supply Non
Dimmable 24V. 120W. 220/240V



REQUIRED
Power supply

Electrical

60.9374
Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply

Electrical

60.9443
Remote Power Supply Non
Dimmable 24V. 100W. 220/240V



REQUIRED
Power supply

Electrical

60.9515
Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply

Electrical

60.9777
Remote Power Supply Non
Dimmable 24V. 120W. 220/240V



REQUIRED

Installation

06.6034.14

Recessed/Surface Feed Connector



REQUIRED

Installation

06.6036.14

Recessed/Surface End Caps. 1 unit kit



OPTIONAL
Accessory

Electrical

60.9630

Controller Casambi. Max 10A



OPTIONAL
Accessory

Electrical

60.9394

Controller 0/1-10V or Push Dim. Max 10A



OPTIONAL
Accessory

Electrical

60.9677

Controller DALI or Push Dim. Max 10A



OPTIONAL
Corner

Installation

06.6030.14

90° Corner. Electrical/mechanical connection



OPTIONAL
Corner

Installation

06.6032.14

Inner corner. Electrical/mechanical connection



OPTIONAL
Installation

06.6035.14

Recessed/Surface Intermediate Connector