


FLOS

06.6002.14 Black

The Micro Running Magnet Recessed Profile NEW


Designed by FLOS Architectural, 2020

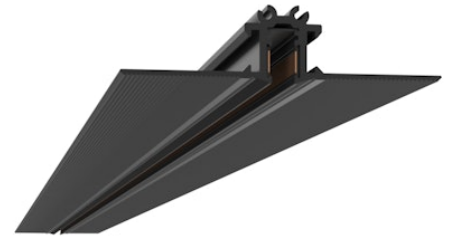

Electromechanical profile of reduced size for recessed installation in plasterboard ceilings/walls with lengths from 1 to 3 m.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

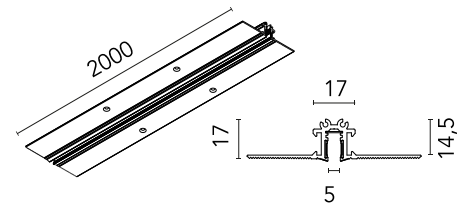

Main specifications

Mounting	Recessed
Environments	Indoor dry location
Power (W)	MAX 120

Physical

Colour	Black
Length (mm)	2000
Net weight (kg)	0.97

Download

[Mounting instructions](#)

[↓ PDF](#)



Electrical

Insulation class	III
Forward voltage (V)	24
LED voltage Vf (Vdc)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)

Notes

Fastening accessories included with the profiles. 90° corners available in the same plane (symmetrical element for left and right corners).

PWM voltage output dimmable drivers shall be used at frequencies between 250 and 500Hz.

Accessories & Power Supply



REQUIRED
Power supply

Electrical

60.9359

24V Remote power supply. 25W
110/240V



REQUIRED
Power supply

Electrical

60.9360

24V Remote power supply. 36W-
110V / 45W-240V



REQUIRED
Power supply

Electrical

60.9361

24V Remote power supply. 57W
220/240V



REQUIRED
Power supply

Electrical

60.9515

Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply

Electrical

60.9374

Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply

60.9516

Remote Power Supply Non
Dimmable 24V. 120W. 220/240V



REQUIRED
Power supply

Electrical

60.9443

Remote Power Supply Non
Dimmable 24V. 100W. 220/240V



REQUIRED
Power supply

Electrical

60.9777

Remote Power Supply Non
Dimmable 24V. 120W. 220/240V



REQUIRED
Installation

06.6034.14
Recessed/Surface Feed Connector



REQUIRED
Installation

06.6036.14
Recessed/Surface End Caps. 1
unit kit



OPTIONAL
Accessory
Electrical

60.9630
Controller Casambi. Max 10A



OPTIONAL
Accessory
Electrical

60.9677
Controller DALI or Push Dim. Max
10A



OPTIONAL
Accessory
Electrical

60.9394
Controller 0/1-10V or Push Dim.
Max 10A



OPTIONAL
Corner
Installation

06.6030.14
90° Corner. Electrical/mechanical
connection



OPTIONAL
Corner
Installation

06.6032.14
Inner corner.
Electrical/mechanical connection



OPTIONAL
Installation

06.6035.14
Recessed/Surface Intermediate
Connector