

The Micro Running Magnet Surface Profile

NEW

Designed by FLOS Architectural, 2020



Length: 1000 - Ceiling surface, Wall surface

'Electromechanical profile of reduced size for installation on surfaces (ceiling or wall) with lengths from 1 to 3 m.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling surface, Wall surface
Environments	Indoor dry location
Light sources included	No
Power (W)	120

Physical

Colour	Black
Length (mm)	1000
Net weight (kg)	0.16
IP internal	20

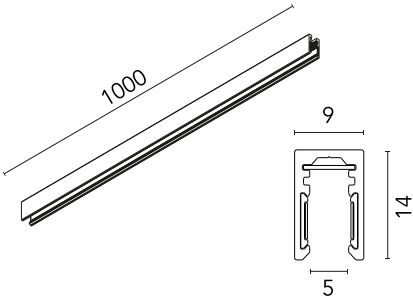

Download

Mounting instructions

PDF



Electrical

Insulation class	III
Forward voltage (V)	24
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Non Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED
Power supply
Electrical

60.9516
Remote Power Supply Non
Dimmable 24V. 120W. 220/240V



REQUIRED
Power supply
Electrical

60.9443
Remote Power Supply Non
Dimmable 24V. 100W. 220/240V



REQUIRED
Power supply
Electrical

60.9515
Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply
Electrical

60.9374
Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply
Electrical

60.9777A
Remote Power Supply Non
Dimmable 24V. 120W. 220/240V



REQUIRED
06.6034.40
Recessed/Surface Feed Connector



REQUIRED
Installation
06.6036.40
Recessed/Surface End Caps. 1
unit kit



OPTIONAL
Accessory
Electrical
60.9394
Controller 0/1-10V or Push Dim.
Max 10A



OPTIONAL
Accessory
Electrical

60.9938
Controller Casambi. Max 12A



OPTIONAL
Control interface
Electrical

60.9677A
LED module Dali/Push dimmable
control unit for 12, 24 or 48Vdc



OPTIONAL
Corner
Installation

06.6031.14
Surface 90° Corner. Electrical /
Mechanical Joint



OPTIONAL
Corner
Installation

06.6033.14
Surface Inner Corner. Electrical /
Mechanical Joint



OPTIONAL
Installation

06.6035.14
Recessed/Surface Intermediate
Connector