


06.6011.40 White

The Micro Running Magnet Surface Profile

NEW

Designed by FLOS Architectural, 2020

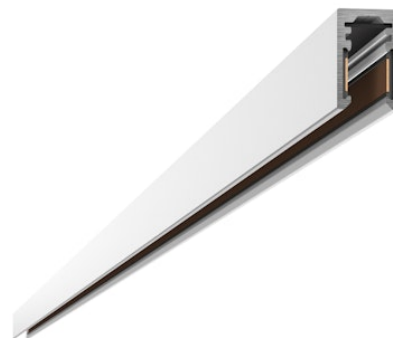

Length: 59.06 - Ceiling surface, Wall surface

'Electromechanical profile of reduced size for installation on surfaces (ceiling or wall) with lengths from 1 to 3 m.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling surface, Wall surface
Environments	Indoor dry location
Light sources included	No
Power (W)	120

Physical

Color	White
Length (in)	59.06
Net weight (lb)	0.53
IP internal	20

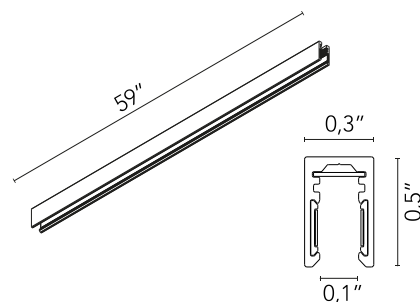

Download

Family spec sheet	ZIP
Mounting instructions	PDF



Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED
Power supply

Electrical

LEDSB60W24V-NDM-D01
LED Driver, 24VDC, 60W, Non-Dimming, 120-277V



REQUIRED
Power supply

LEDSB96W24V-NDM-D01
LED Driver, 24VDC, 96W, Non-Dimming, 120-277V



REQUIRED

06.6034.40

Recessed/Surface Feed Connector



REQUIRED

Installation

06.6036.40
Recessed/Surface End Caps. 1 unit kit



OPTIONAL
Corner

Installation

06.6033.40
Surface Inner Corner. Electrical / Mechanical Joint



OPTIONAL
Corner

Installation

06.6031.40
Surface 90° Corner. Electrical / Mechanical Joint



OPTIONAL

Installation

06.6035.14
Recessed/Surface Intermediate Connector