


06.6012.40 White

## The Micro Running Magnet Surface Profile

NEW

Designed by FLOS Architectural, 2020

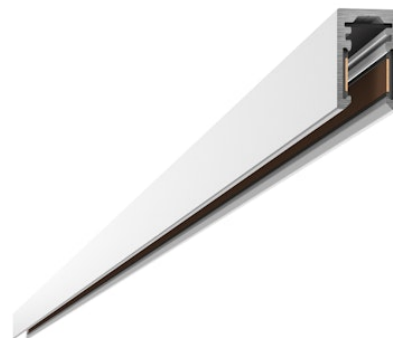

Length: 78.75 - Ceiling surface, Wall surface

'Electromechanical profile of reduced size for installation on surfaces (ceiling or wall) with lengths from 1 to 3 m.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

### Main specifications

Mounting	Ceiling surface, Wall surface
Environments	Indoor dry location
Light sources included	No
Power (W)	120

### Physical

Color	White
Length (in)	78.75
Net weight (lb)	0.71
IP internal	20

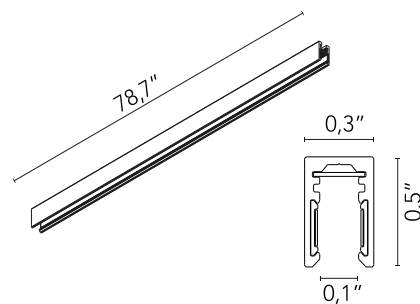

### Download

Family spec sheet	ZIP
Mounting instructions	PDF



## Electrical

Insulation class	III
Forward voltage (V)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable
Dimming interface	Remote Dimmable (Dimmer Not Included)

Accessories & Power Supply



REQUIRED  
Power supply

Electrical

LEDSB60W24V-NDM-D01  
LED Driver, 24VDC, 60W, Non-Dimming, 120-277V



REQUIRED  
Power supply

LEDSB96W24V-NDM-D01  
LED Driver, 24VDC, 96W, Non-Dimming, 120-277V



REQUIRED

06.6034.40

Recessed/Surface Feed Connector



REQUIRED

Installation

06.6036.40  
Recessed/Surface End Caps. 1 unit kit



OPTIONAL  
Corner

Installation

06.6033.40  
Surface Inner Corner. Electrical / Mechanical Joint



OPTIONAL  
Corner

Installation

06.6031.40  
Surface 90° Corner. Electrical / Mechanical Joint



OPTIONAL

Installation

06.6035.14  
Recessed/Surface Intermediate Connector