


## Thin LED 1034 mm BLIND


Designed by FLOS Architectural, 2015

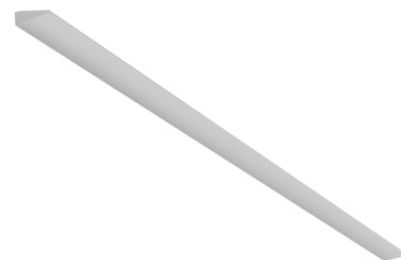

Wall application luminaire for indirect lighting with LED. Remote transformer not included.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

Mounting	Wall surface
Environments	Indoor dry location
Number of lamps	1

### Physical

Colour	Anodized Aluminium
Trim	No
Orientation	Fixed
Length (mm)	1034
Net weight (kg)	0.9
IP internal	20
IP external	20

### Download

Mounting instructions

[↓ PDF](#)



### Electrical

Insulation class	III
Emergency	No

Notes

To create continuous profile lines.

---

Accessories & Power Supply



REQUIRED  
Power supply  
Electrical

60.9089  
Electronic transformer with  
constant voltage (24V) for LED.  
100/240V. 60W



REQUIRED  
Power supply  
Electrical

60.9681  
Remote power supply. Dimmable  
through 0-1/10V.protocol. 24V.  
Dimming range 10-100%



REQUIRED  
Power supply  
Electrical

60.9683  
Remote power supply. Dimmable  
through Casambi protocol. 24V.  
Dimming range 10-100%



REQUIRED  
Power supply  
Electrical

60.9880  
Remote power supply. Dimmable  
through DALI protocol. 24V.  
Dimming range 10-100%.  
Minimum load 20W



REQUIRED  
Power supply  
Electrical

60.9881  
Mains Dimming, 24Vdc  
continuous voltage power supply  
60W, 220/240V - 50/60Hz