


# FLOS

06.1020.00E

## White DALI, DMX & RF Slave Interface Dimmable

Slave interface to expand the DALI/DMX/RF signal with two 5 pole distributors for easy connection. It's able to expand the Master signal in 10 Wall Piercings. If more Wall Piercings are in the same installation it's necessary to expand the signal with more Slave interfaces. Electronic power supply not included.

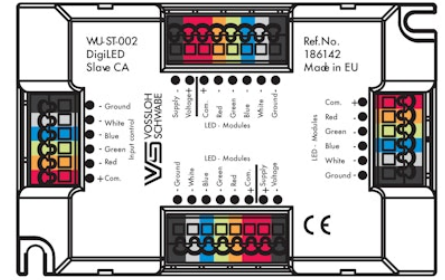

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

Environments Indoor dry location

### Physical

Net weight (kg) 0.1  
IP internal 20

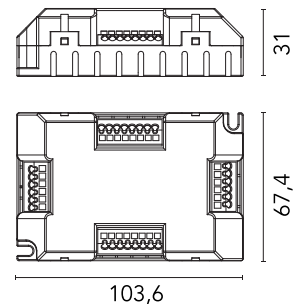

### Photometric

Extreme cut off No

### Electrical

Power supply Remote excluded  
Power supply type Dimmable DMX, Dimmable DALI 1

### Notes

See Use Cove Lighting LED products mounting instructions selection table