


FLOS

05.6722.14 Black


Workmates Floor Double High Efficiency Tunable White Touch Dimming

Designed by FLOS Architectural, 2023

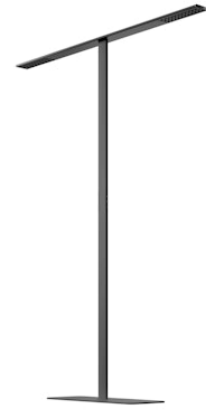

96W - 15542lm - 4000K - CRI> 90 - Beam° 75

Freestanding luminaire. Double Up&Down emission, with greater light flux amounts in the upper part. High-efficiency, perfectly homogeneous asymmetric Down light source on the functional plane at distances of Up to 2 meters. Tunable White variable CCT Up light source. Casambi wireless control and integrated manual Touch Dimming capacitive keypad. UGR<19. EN12464 - cd/m2 @ 65°<3000 compliant. The base and power supply are not included and must be ordered separately.

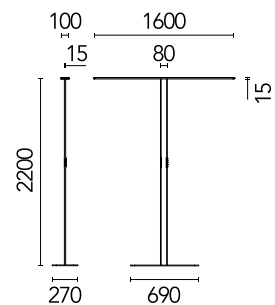

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

| | |
|-------------------|---------------------|
| Mounting | Floor |
| Environments | Indoor dry location |
| Light source type | LED |
| LED type | Top LED |
| Number of lamps | 1 |
| Power (W) | 96 |
| System power (W) | 104 |
| Source flux (lm) | 19188 |
| Lumen Output (lm) | 15542 |

Physical

| | |
|------------------|-------|
| Colour | Black |
| Field cuttable | No |
| Orientation | Fixed |
| Cord colour | Black |
| Cord length (mm) | 2000 |
| Net weight (kg) | 6.69 |
| IP internal | 20 |

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)




Ecodesign and Energy Labelling

 Replaceable (LED only) light source by a professional

 Replaceable control gear by an end-user

Schematic light drawing



Beam Angle: - 98°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1 | 3142 | 1.53 |
| 2 | 785 | 3.05 |
| 3 | 349 | 4.58 |
| 4 | 196 | 6.11 |
| 5 | 126 | 7.64 |

Photometric

| | |
|--------------------------|-----------------------|
| Lighting type | Total |
| Light distribution | Symmetric |
| CCT (K) | 4000 |
| CRI> | 90 |
| Rf fidelity index | 89 |
| Rg gamut index | 98 |
| LED Life / Failure Ratio | L80B50>60.000h_Tc85°C |
| Beam angle C0-180 (°) | 75 |
| Beam angle C90-270 (°) | 98 |
| Extreme cut off | Yes |
| UGR _L | <16 |

Electrical

| | |
|-------------------|-------------------|
| Insulation class | III |
| Power supply | Remote excluded |
| Dimmable | Yes |
| Power supply type | Dimmer on board |
| Dimming interface | Dimmer Integrated |
| Plug type | Twist and Lock |
| Batteries inside | No |

Accessories & Power Supply



REQUIRED
Power supply
06.0500.14
Power Supply Kit



REQUIRED
08.1060.14
Workmates Floor Double



REQUIRED
08.1061.14
Workmates Floor Double