

05.6232.40.9V White

Workmates Surface Large Full Spectrum 0-10V Dimming NEW

Designed by FLOS Architectural, 2023



28W - 2521lm - 4000K - CRI> 98 - Beam° 73

Ceiling surface luminaire. Highquality colour rendering Full Spectrum light source. Integrated driver. UGR<16. EN12464 - cd/m2 @ 65°<3000 compliant.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	28
System power (W)	28
Source flux (lm)	3146
System flux (lm)	2521

Physical

Color	White
IP internal	20

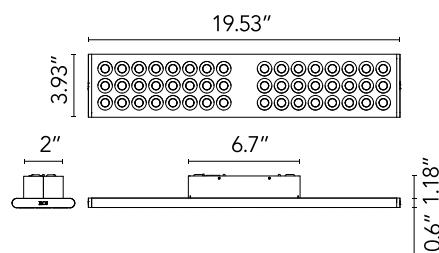

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)


Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



Schematic light drawing



Ecodesign and Energy Labelling

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	4000
CRI>	98
Rf fidelity index	97
Rg gamut index	101
LED Life / Failure Ratio	L80B50>60.000h_Tc85°C
Beam angle C0-180 (°)	73
Beam angle C90-270 (°)	75
Extreme cut off	Yes
UGR _L	<16

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120
Forward voltage (V)	34
LED current (mA)	700
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)