

# FLOS

05.6236.40.YU All White

## Workmates Surface Large Full Spectrum Dali NEW

Designed by FLOS Architectural, 2023



Ceiling surface luminaire. High quality colour rendering Full Spectrum light source. Integrated driver. UGR<16. EN12464 - cd/m<sup>2</sup> @ 65°<3000 compliant.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Ceiling surface
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	27.6
System power (W)	28
Source flux (lm)	2902
Lumen Output (lm)	2392
Efficacy (lm/W)	86

### Physical

Colour	All White
Orientation	Fixed
Net weight (kg)	0.97
IP internal	20

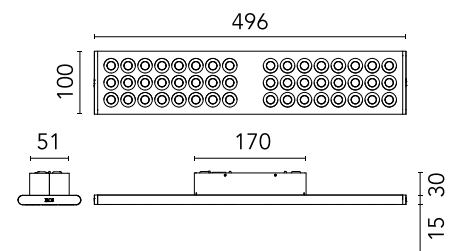

### Photometric Files

LDT / IES [↓ ZIP](#)

### Technical Drawings

2D [↓ ZIP](#)


3D [↓ ZIP](#)

### Ecodesign and Energy Labelling


This product contains a light source of energy efficiency class G



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional



<https://professional.flos.com/en/global/product/workmates-surface-large-full-spectrum-dali-05.6236.40.yu/>


05.6236.40.YU

©2022 Flos - P.IVA 00290820174 - 11/5/2025

[professional.flos.com](https://professional.flos.com) | [info@flos.com](mailto:info@flos.com) 1/2

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

## Schematic light drawing

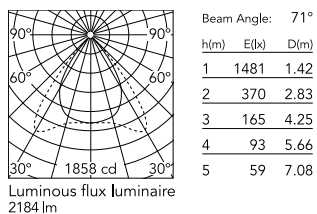

### Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	3500
CRI>	98
McAdam steps (SDCM)	3
Rf fidelity index	89
Rg gamut index	106
LED Life / Failure Ratio	L80B50>60.000h_Tc85°C
Beam angle C0-180 (°)	82
Beam angle C90-270 (°)	71
Extreme cut off	Yes
UGR <sub>L</sub>	<16

### Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Forward voltage (V)	48
LED current (mA)	700
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable DALI 2
Dimming range (%)	1-100
Dimming interface	Remote Dimmable (Dimmer Not Included)

### Notes

Before placing your order, please consult the product details also on the catalogue, in its technical data sheet and in the installation and assembly instructions to find all the information that may not be included in this site or that could be relevant to your specific project or installation.