



05.6237.40.ZX All White

## Workmates Surface Large Full Spectrum Phase Cut

NEW

Designed by FLOS Architectural




28W - 2593lm - 4000K - CRI> 98 - Beam° 71

Ceiling surface luminaire. Highquality colour rendering Full Spectrum light source. Integrated driver. UGR<16. EN12464 - cd/m2 @ 65°<3000 compliant.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

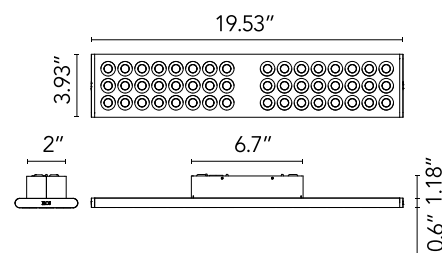

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Environments           | Indoor dry location |
| Light Source Type      | LED                 |
| Light sources included | Yes                 |
| Power (W)              | 28                  |
| System power (W)       | 28                  |
| Source flux (lm)       | 3146                |
| System flux (lm)       | 2593                |

### Physical

Color All White



### Download

Mounting instructions [↓ PDF](#)

### Photometric Files


LDT / IES [↓ ZIP](#)

### Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)

Schematic light drawing



Photometric

|                        |      |
|------------------------|------|
| CCT (K)                | 4000 |
| CRI>                   | 98   |
| Beam angle C0-180 (°)  | 71   |
| Beam angle C90-270 (°) | 82   |
| Extreme cut off        | No   |
| UGR <sub>L</sub>       | <16  |

Electrical

|                    |                                          |
|--------------------|------------------------------------------|
| Frequency (Hz)     | 50/60                                    |
| Main voltage (Vac) | 120                                      |
| LED current (mA)   | 700                                      |
| Dimmable           | Yes                                      |
| Dimming type       | Dimmable ELV                             |
| Dimming interface  | Remote Dimmable<br>(Dimmer Not Included) |