

05.6210.40.RH All White

Workmates Surface Small Full Spectrum 0-10V Dimming NEW

Designed by FLOS Architectural, 2023



14W - 1231lm - 3000K - CRI> 98 - Beam° 76

Ceiling surface luminaire. Highquality colour rendering Full Spectrum light source. Integrated driver. UGR<16. EN12464 - cd/m2 @ 65°<3000 compliant.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	14
System power (W)	14
Source flux (lm)	1518
System flux (lm)	1231

Physical

Color	All White
IP internal	20

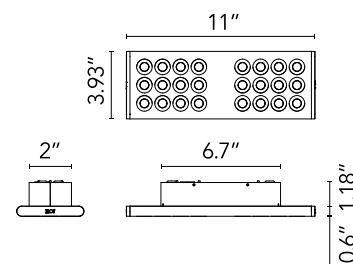

Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download ZIP](#)


Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Schematic light drawing



Ecodesign and Energy Labelling



Replaceable (LED only)
light source by a
professional

Replaceable control
gear by a professional

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	98
Rf fidelity index	87
Rg gamut index	103
LED Life / Failure Ratio	L80B50>60.000h_Tc85°C
Beam angle C0-180 (°)	76
Beam angle C90-270 (°)	76
Extreme cut off	Yes
UGR _L	<16

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120
Forward voltage (V)	34
LED current (mA)	350
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)