

FLOS

05.6215.14.9V Black

Workmates Surface Small Full Spectrum 0-10V Dimming

NEW

Designed by FLOS Architectural, 2023



14W - 1109lm - 3000K - CRI> 98 - Beam° 71

Ceiling surface luminaire. Highquality colour rendering Full Spectrum light source. Integrated driver. UGR<16. EN12464 - cd/m2 @ 65°<3000 compliant.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	14
System power (W)	14
Source flux (lm)	1518
System flux (lm)	1109

Physical

Color	Black
IP internal	20

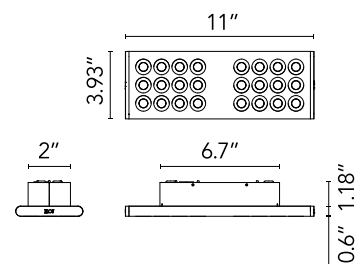

Download

Mounting instructions [Download PDF](#)

Photometric Files

LDT / IES [Download ZIP](#)


Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)




Schematic light drawing



Beam Angle: 71°

h(m)	E(lx)	D(m)
1	736	1.43
2	184	2.86
3	82	4.30
4	46	5.73
5	29	7.16

Ecodesign and Energy Labelling

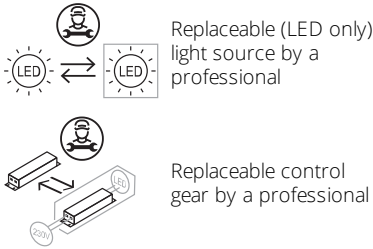

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	98
Rf fidelity index	87
Rg gamut index	103
LED Life / Failure Ratio	L80B50>60.000h_Tc85°C
Beam angle C0-180 (°)	71
Beam angle C90-270 (°)	82
Extreme cut off	Yes
UGR _L	<16

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120
Forward voltage (V)	34
LED current (mA)	350
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)