

05.6211.40.QF White

Workmates Surface Small Full Spectrum Phase Cut NEW

Designed by FLOS Architectural, 2023



14W - 1151lm - 3500K - CRI> 98 - Beam° 75

Ceiling surface luminaire. Highquality colour rendering Full Spectrum light source. Integrated driver. UGR<16. EN12464 - cd/m2 @ 65°<3000 compliant.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	14
System power (W)	14
Source flux (lm)	1526
System flux (lm)	1151

Physical

Color	White
IP internal	20

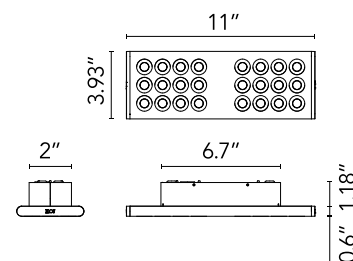

Download

[Mounting instructions](#) [PDF](#)

Photometric Files

[LDT / IES](#) [ZIP](#)


Technical Drawings

[2D](#) [ZIP](#)

[3D](#) [ZIP](#)



Schematic light drawing



Ecodesign and Energy Labelling



Replaceable (LED only)
light source by a
professional

Replaceable control
gear by a professional

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3500
CRI>	98
Rf fidelity index	89
Rg gamut index	106
LED Life / Failure Ratio	L80B50>60.000h_Tc85°C
Beam angle C0-180 (°)	75
Beam angle C90-270 (°)	76
Extreme cut off	Yes
UGR _L	<16

Electrical

Frequency (Hz)	50/60
Main voltage (Vac)	120
Forward voltage (V)	34
LED current (mA)	350
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable ELV
Dimming interface	Remote Dimmable (Dimmer Not Included)