


## Workmates Suspension Up&Down High Efficiency

Designed by FLOS Architectural, 2023



LED - Top LED - 58.5W - 5570lm - 3000K - CRI> 90 - Beam° 73

Suspension luminaire. Up&Down emission. High-efficiency light source. Driver not included (accessory kit for remote or surface driver). For Non Dimming models, you can configure the Up&Down luminous flux in 70/30 and 40/60 ratios (select the accessory kit for the driver concerned). Adjustable suspension height. Mechanical union module available for modular lines for various units. UGR<19. EN12464 - cd/m2 @ 65°<3000 compliant. Casambi, maximum distance between fixtures: 50m.

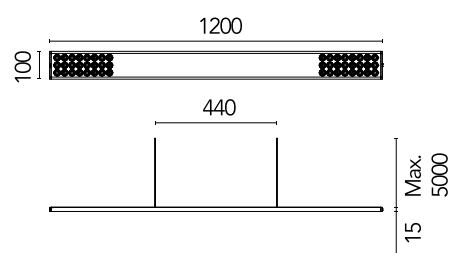

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Suspension          |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Top LED             |
| Lamp category          | LED                 |
| Number of lamps        | 1                   |
| Power (W)              | 58.5                |
| System power (W)       | 61                  |
| Source flux (lm)       | 6471                |
| Lumen Output (lm)      | 5570                |

### Physical

|                  |           |
|------------------|-----------|
| Colour           | All White |
| Cord colour      | White     |
| Cord length (mm) | 5000      |
| Net weight (kg)  | 2.09      |
| IP internal      | 20        |

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files



LDT / IES [↓ ZIP](#)

### Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

### Ecodesign and Energy Labelling

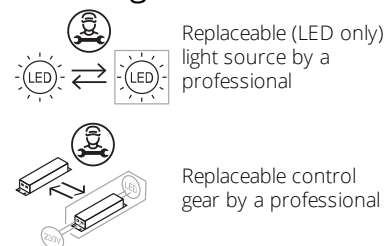

Schematic light drawing



Photometric

|                          |                       |
|--------------------------|-----------------------|
| Lighting type            | Total                 |
| Light distribution       | Symmetric             |
| CCT (K)                  | 3000                  |
| CRI>                     | 90                    |
| McAdam steps (SDCM)      | 3                     |
| Rf fidelity index        | 89                    |
| Rg gamut index           | 103                   |
| LED Life / Failure Ratio | L80B50>60.000h_Tc85°C |
| Beam angle C0-180 (°)    | 73                    |
| Beam angle C90-270 (°)   | 74                    |
| Extreme cut off          | Yes                   |
| UGR <sub>L</sub>         | <16                   |

Electrical

|                     |                  |
|---------------------|------------------|
| Forward voltage (V) | 48               |
| LED current (mA)    | 700              |
| Power supply        | Remote           |
| Dimmable            | Yes              |
| Power supply type   | Dimmable Casambi |
| Batteries inside    | No               |

Accessories & Power Supply



REQUIRED  
Power supply  
Installation

08.0906.AP  
Remote Power Supply Kit for  
Workmates Suspension -  
Dimmable Casambi



REQUIRED  
Power supply  
Installation

08.0906.14  
Remote Power Supply Kit for  
Workmates Suspension -  
Dimmable Casambi



REQUIRED  
Power supply  
Installation

08.0906.40  
Remote Power Supply Kit for  
Workmates Suspension -  
Dimmable Casambi



REQUIRED  
Power supply  
Electrical

08.0915.AP  
Surface Power Supply Kit for  
Workmates Suspension  
Up&Down Tunable White -  
Casambi & Dimmable Dali



REQUIRED  
Power supply  
Electrical

08.0915.14  
Surface Power Supply Kit for  
Workmates Suspension  
Up&Down Tunable White -  
Casambi & Dimmable Dali



REQUIRED  
Power supply  
Electrical

08.0915.40  
Surface Power Supply Kit for  
Workmates Suspension  
Up&Down Tunable White -  
Casambi & Dimmable Dali



REQUIRED  
Power supply

08.0925.AP  
Recessed Power Supply Kit for  
Workmates Suspension  
Up&Down Tunable White -  
Casambi & Dimmable Dali



REQUIRED  
Power supply

08.0925.14  
Recessed Power Supply Kit for  
Workmates Suspension  
Up&Down Tunable White -  
Casambi & Dimmable Dali



## REQUIRED Power supply

08.0925.40

Recessed Power Supply Kit for  
Workmates Suspension  
Up&Down Tunable White -  
Casambi & Dimmable Dali

## OPTIONAL Accessory

Installation

06.0436.40

Interconnection Accessory