

FLOS


05.6390.AP.DD Anodized Silver

Workmates Suspension Up&Down Tunable White Full Spectrum NEW

Designed by FLOS Architectural, 2023



Suspension luminaire. Up&Down emission, with greater light flux amounts in the upper part. Highquality colour rendering Down Full Spectrum light source. Tunable White variable CCT Up light source. Driver not included (accessory kit for remote or surface driver). Adjustable suspension height. Mechanical union module available for modular lines for various units. UGR<19. EN12464 - cd/m2 @ 65°<3000 compliant. Casambi, maximum distance between fixtures: 50m

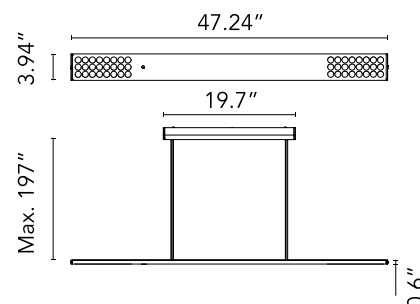

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	49
System power (W)	52
Source flux (lm)	6181
System flux (lm)	5189

Physical

Color	Anodized Silver
Orientation	Fixed
Cord color	Transparent
Net weight (lb)	4.61
IP internal	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF

Photometric Files


LDT / IES	ZIP
-----------	-----

Technical Drawings

2D	ZIP
3D	ZIP




Schematic light drawing



Beam Angle: - 75°

h(m)	E(lx)	D(m)
1	1564	1.47
2	391	2.94
3	174	4.40
4	98	5.87
5	63	7.34

Ecodesign and Energy Labelling

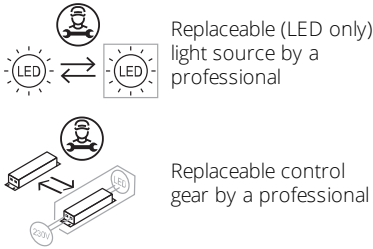

Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	3000
CRI>	98
McAdam steps (SDCM)	3
Rf fidelity index	97
Rg gamut index	101
LED Life / Failure Ratio	L80B50>60.000h_Tc85°C
Beam angle C0-180 (°)	73
Beam angle C90-270 (°)	75
Extreme cut off	Yes
UGR _L	<16

Electrical

Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable DALI 2
Batteries inside	No

Notes

Class 2 Listed

Accessories & Power Supply



REQUIRED
Accessory

Installation

08.0916.40.9S

SURF.KIT WH WORKM STEEL
WIRE 2C NOPSU UL



REQUIRED
Accessory

Installation

08.0916.AP.9S

SURF.KIT AP WORKM STEEL WIRE
2C NOPSU UL