

05.5760.40 White


Workmates Track Large High Efficiency Non Dimmable NEW

Designed by FLOS Architectural, 2023



21W - 2654lm - 3000K - CRI> 90 - Beam° 67

Luminaire for use on a three-phase track, with adapters for No Dim, Dali and Casambi (wireless) control. High-efficiency light source. Also available in a The Running Magnet version. This can rotate by 360° on the axis of its rear arm to reach any position relative to the track (from parallel to erpendicular). UGR<19. EN12464 - cd/m2 @ 65°<3000 compliant. Casambi, maximum distance between fixtures: 50m.

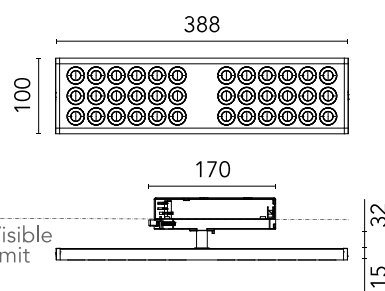

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	yes
LED type	Top LED
Number of lamps	1
Power (W)	21
Source flux (lm)	3080
Lumen Output (lm)	2654

Physical

Colour	White
Net weight (kg)	0.86
IP internal	20

Download

[Mounting instructions](#) [↓ PDF](#)

Photometric Files

[LDT / IES](#) [↓ ZIP](#)


Technical Drawings

[2D](#) [↓ ZIP](#)

[3D](#) [↓ ZIP](#)



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
Rf fidelity index	87
Rg gamut index	103
LED Life / Failure Ratio	L80B50>60.000h_Tc85°C
Beam angle C0-180 (°)	67
Beam angle C90-270 (°)	67
Extreme cut off	No
UGR _L	<16

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED current (mA)	500
Power supply	Integrated
Dimmable	No
Power supply type	Non Dimmable
Dimming interface	Not Dimmable

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class **G**



Replaceable (LED only) light source by a professional



Replaceable control gear by a professional