

Zero Track Surface Profile

Designed by FLOS Architectural, 2018



Electro-mechanical indoor profile for surface installation (ceiling or wall). To be fixed with specific screw plugs that come with the profile.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling surface, Wall surface
Environments	Indoor dry location
Light sources included	no

Physical

Color	Chrome
Trim	No
Length (in)	78.74
Net weight (lb)	0.91
IP internal	20

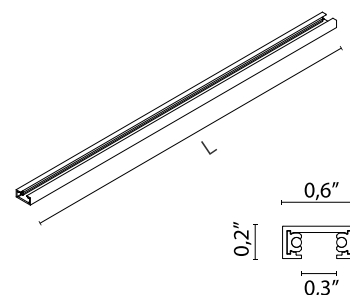

Download

Family spec sheet	ZIP
Mounting instructions	PDF



Photometric

Extreme cut off	No
-----------------	----

Electrical

Insulation class	III
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable Casambi

Notes

It is necessary to order the power connector, intermediate connectors and covers separately. Feed unit connectors available as 90° flat corner and curve (symmetric element for left/right corner), ceiling/wall - wall/wall inner corner, as well as "T" and "X" shape. For vertical installations, installing the stopper is mandatory. It must be ordered separately.

PWM voltage output dimmable drivers shall be used at frequencies between 250 and 500Hz.

Accessories & Power Supply



REQUIRED
Power supply

Electrical

LEDSB60W24V-NDM-D01
LED Driver, 24VDC, 60W, Non-Dimming, 120-277V



REQUIRED
Power supply

LEDSB96W24V-NDM-D01
LED Driver, 24VDC, 96W, Non-Dimming, 120-277V



REQUIRED
06.2509.14
Zero Track Surface Profile. End Cap



REQUIRED
06.2509.40
Zero Track Surface Profile. End Cap



OPTIONAL
Accessory
08.0630.14
Stopper



OPTIONAL
Accessory
08.0630.40
Stopper



OPTIONAL
06.2506.14
Zero Track Surface Profile. Intermediate Connector



OPTIONAL
06.2506.40
Zero Track Surface Profile. Intermediate Connector



OPTIONAL

06.2541.14

Zero Track Surface Profile. Feed
intermediate connector



OPTIONAL

06.2541.18

Zero Track Surface Profile. Feed
intermediate connector



OPTIONAL

06.2541.40


Zero Track Surface Profile. Feed
intermediate connector



OPTIONAL

06.2541.CZ

Zero Track Surface Profile. Feed
intermediate connector



OPTIONAL
Corner

06.2542.14

Zero Track Surface Profile. 90°
Flat Corner



OPTIONAL
Corner

06.2542.18


Zero Track Surface Profile. 90°
Flat Corner



OPTIONAL
Corner

06.2542.40

Zero Track Surface Profile. 90°
Flat Corner



OPTIONAL
Corner

06.2542.CZ

Zero Track Surface Profile. 90°
Flat Corner



OPTIONAL
Corner

06.2543.14

Zero Track Surface Profile.
Ceiling/wall - wall/wall inner corner



OPTIONAL
Corner

06.2543.18

Zero Track Surface Profile.
Ceiling/wall - wall/wall inner corner



OPTIONAL
Corner

06.2543.40

Zero Track Surface Profile.
Ceiling/wall - wall/wall inner corner



OPTIONAL
Corner

06.2543.CZ

Zero Track Surface Profile.
Ceiling/wall - wall/wall inner corner



OPTIONAL
Corner

06.2544.14

Zero Track Surface Profile.
Interior ceiling/ceiling-wall/wall
curve



OPTIONAL
Corner

06.2544.18

Zero Track Surface Profile.
Interior ceiling/ceiling-wall/wall
curve



OPTIONAL
Corner

06.2544.40

Zero Track Surface Profile.
Interior ceiling/ceiling-wall/wall
curve



OPTIONAL
Corner

06.2544.CZ

Zero Track Surface Profile.
Interior ceiling/ceiling-wall/wall
curve



OPTIONAL
Corner

06.2545.14


Zero Track Surface Profile. T-
shaped connector



OPTIONAL
Corner

06.2545.18


Zero Track Surface Profile. T-
shaped connector



OPTIONAL
Corner

06.2545.40

Zero Track Surface Profile. T-
shaped connector



OPTIONAL
Corner

06.2545.CZ

Zero Track Surface Profile. T-
shaped connector



OPTIONAL
Corner

06.2546.14

Zero Track Surface Profile. Cross-
shaped connector



OPTIONAL
Corner

06.2546.18


Zero Track Surface Profile. Cross-
shaped connector



OPTIONAL
Corner

06.2546.40

Zero Track Surface Profile. Cross-
shaped connector



OPTIONAL
Corner

06.2546.CZ

Zero Track Surface Profile. Cross-
shaped connector