

# FLOS

06.2502.14 Black

## Zero Track Surface Profile

Designed by FLOS Architectural, 2018



Electro-mechanical indoor profile for surface installation (ceiling or wall). To be fixed with specific screw plugs that come with the profile.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Surface
Environments	Indoor dry location
Icos	No

### Physical

Colour	Black
Trim	No
Length (mm)	3000
Net weight (kg)	0.62
IP internal	20

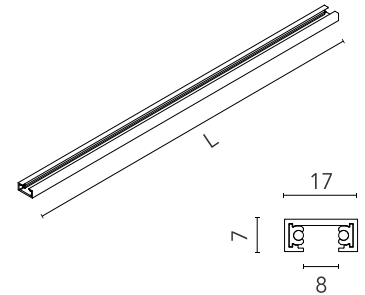

### Download

[Mounting instructions](#)

[PDF](#)



## Electrical

Insulation class	III
Main voltage (Vac)	24
LED voltage Vf (Vdc)	24
Driver	Remote excluded
Dimmable	Yes
Dimming type	Non Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1

## Notes

It is necessary to order the power connector, intermediate connectors and covers separately. Feed unit connectors available as 90° flat corner and curve (symmetric element for left/right corner), ceiling/wall - wall/wall inner corner, as well as "T" and "X" shape. For vertical installations, installing the stopper is mandatory. It must be ordered separately.

PWM voltage output dimmable drivers shall be used at frequencies between 250 and 500Hz.

---

## Accessories & Power Supply



REQUIRED  
Power supply

Electrical

60.9359  
24V Remote power supply. 25W  
110/240V



REQUIRED  
Power supply

Electrical

60.9360  
24V Remote power supply. 36W-  
110V / 45W-240V



REQUIRED  
Power supply

Electrical

60.9361  
24V Remote power supply. 57W  
220/240V



REQUIRED  
Power supply

Electrical

60.9515  
Remote Power Supply Non  
Dimmable 24V. 60W. 220/240V



REQUIRED  
Power supply

60.9516  
Remote Power Supply Non  
Dimmable 24V. 120W. 220/240V



REQUIRED  
Power supply

Electrical

60.9374  
Remote Power Supply Non  
Dimmable 24V. 60W. 220/240V



REQUIRED  
Power supply

Electrical

60.9777  
Remote Power Supply Non  
Dimmable 24V. 120W. 220/240V



REQUIRED  
Power supply

Electrical

60.9443  
Remote Power Supply Non  
Dimmable 24V. 100W. 220/240V



REQUIRED

06.2509.14

Zero Track Surface Profile. End Cap



REQUIRED

06.2510.14

Power supply surface end. 57W - 220/240V



REQUIRED

06.2511.14

Power supply surface middle. 57W - 220/240V



REQUIRED

06.2540.14

Zero Track Surface Profile. Feed Unit for Remote Power Supply Unit



OPTIONAL  
Accessory

Electrical

60.9630

Controller Casambi. Max 10A



OPTIONAL  
Accessory

Electrical

60.9394

Controller 0/1-10V or Push Dim. Max 10A



OPTIONAL  
Accessory

Electrical

60.9677

Controller DALI or Push Dim. Max 10A




OPTIONAL

06.2506.14

Zero Track Surface Profile. Intermediate Connector



OPTIONAL  
06.2541.14  
Zero Track Surface Profile. Feed intermediate connector



OPTIONAL  
Corner  
06.2542.14  
Zero Track Surface Profile. 90° Flat Corner



OPTIONAL  
Corner  
06.2543.14  
Zero Track Surface Profile. Ceiling/wall - wall/wall inner corner



OPTIONAL  
Corner  
06.2544.14  
Zero Track Surface Profile. Interior ceiling/ceiling-wall/wall curve



OPTIONAL  
Corner  
06.2545.14  
Zero Track Surface Profile. T-shaped connector



OPTIONAL  
Corner  
06.2546.14  
Zero Track Surface Profile. Cross-shaped connector



OPTIONAL  
Accessory  
08.0630.14  
Stopper