

# FLOS

06.2545.14 Black

## Zero Track Surface Profile. T-shaped connector

Designed by FLOS Architectural, 2020



T-shaped connector. Can be powered via connections on the back.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

Mounting	Ceiling surface, Wall surface
Environments	Indoor dry location

### Physical

Colour	Black
Trim	No
Net weight (kg)	0.01
IP internal	20

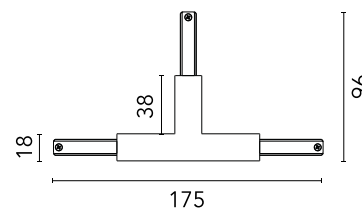

### Photometric

Extreme cut off	No
-----------------	----

### Electrical

Insulation class	III
LED voltage Vf (Vdc)	24.00

### Download

[Mounting instructions](#)



### Ecodesign and Energy Labelling



Replaceable control gear by a professional

## Accessories & Power Supply



REQUIRED  
Power supply

Electrical

60.9443

Remote Power Supply Non  
Dimmable 24V. 100W. 220/240V



REQUIRED  
Power supply

Electrical

60.9515

Remote Power Supply Non  
Dimmable 24V. 60W. 220/240V



REQUIRED  
Power supply

Electrical

60.9374

Remote Power Supply Non  
Dimmable 24V. 60W. 220/240V



REQUIRED  
Power supply

Electrical

60.9777A

Remote Power Supply Non  
Dimmable 24V. 120W. 220/240V



REQUIRED  
Power supply

Electrical

60.9516

Remote Power Supply Non  
Dimmable 24V. 120W. 220/240V