

Zero Track Surface Profile. T-shaped connector

Designed by FLOS Architectural, 2020



T-shaped connector. Can be powered via connections on the back.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling surface, Wall surface
Environments	Indoor dry location
Light sources included	no

Physical

Colour	Deep Brown
Trim	No
Net weight (kg)	0.01
IP internal	20

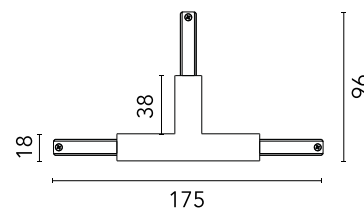

Download

Mounting instructions

[↓ PDF](#)




Photometric

Extreme cut off	No
-----------------	----

Electrical

Insulation class	III
------------------	-----

Ecodesign and Energy Labelling



Replaceable control gear by a professional

Accessories & Power Supply



REQUIRED
Power supply

Electrical

60.9516
Remote Power Supply Non
Dimmable 24V. 120W. 220/240V



REQUIRED
Power supply

Electrical

60.9443
Remote Power Supply Non
Dimmable 24V. 100W. 220/240V



REQUIRED
Power supply

Electrical

60.9515
Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply

Electrical

60.9374
Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply

Electrical

60.9777A
Remote Power Supply Non
Dimmable 24V. 120W. 220/240V