


06.2545.40 White

Zero Track Surface Profile. T-shaped connector

Designed by FLOS Architectural, 2020

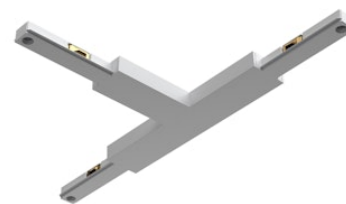

T-shaped connector. Can be powered via connections on the back.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Ceiling surface, Wall surface
Environments	Indoor dry location
Light sources included	no

Physical

Colour	White
Trim	No
Net weight (kg)	0.01
IP internal	20

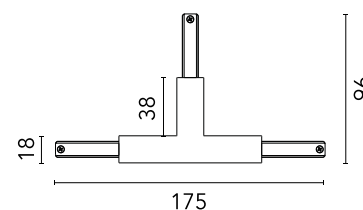

Download

Mounting instructions

[↓ PDF](#)




Photometric

Extreme cut off	No
-----------------	----

Electrical

Insulation class	III
------------------	-----

Ecodesign and Energy Labelling



Replaceable control gear by a professional

Accessories & Power Supply



REQUIRED
Power supply
Electrical

60.9516
Remote Power Supply Non
Dimmable 24V. 120W. 220/240V



REQUIRED
Power supply
Electrical

60.9443
Remote Power Supply Non
Dimmable 24V. 100W. 220/240V



REQUIRED
Power supply
Electrical

60.9515
Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply
Electrical

60.9374
Remote Power Supply Non
Dimmable 24V. 60W. 220/240V



REQUIRED
Power supply
Electrical

60.9777A
Remote Power Supply Non
Dimmable 24V. 120W. 220/240V