


06.2545.40 White

Zero Track Surface Profile. T-shaped connector

Designed by FLOS Architectural, 2020

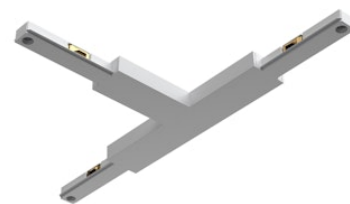

T-shaped connector. Can be powered via connections on the back.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

Mounting	Ceiling surface, Wall surface
Environments	Indoor dry location
Light sources included	no

Physical

Color	White
Trim	No
Length (in)	2.95
Net weight (lb)	0.03
IP internal	20

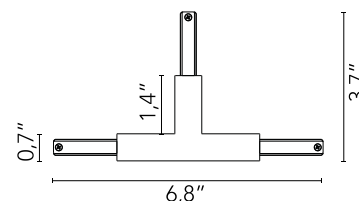

Download

Family spec sheet	ZIP
Mounting instructions	PDF



Photometric

Extreme cut off	No
-----------------	----

Electrical

Insulation class	III
------------------	-----

Ecodesign and Energy Labelling



Replaceable control gear by a professional

Accessories & Power Supply



REQUIRED
Power supply

Electrical

LEDSB96W24V-VAR-Y01

LED power supply source for
remote installation, 24V/96W,
120-277V, Variable dim Triac, 0-
10V Dimming PWM