

FLOS

■ AU140031 Matte Black


2097/30 US Chandelier with Incandescent & LED light bulbs

Designed by Gino Sarfatti, 1958



Incandescent - 30 x 15W

Since 1958, this iconic Gino Sarfatti design has served as an ultra-modern representation of the traditional mid-century chandelier. Every detail of this state-of-the-art ceiling light is exceptional, from the mirror-polish finish of its main steel structure to the way each bulb is fitted with its own horizontal arm and the graceful wiring meanders down the stem. The Mod 2097 by Gino Sarfatti holds 18, 30 or 50 incandescent bulbs, emitting indirect light. It features a ceiling fitting and includes a suspension cable. Available in brass, chrome and matte black plating in 3 models: 2097/18 : 18 X 15W E14 clear bulb incandescent - 20.1" x 27.2" 2097/30 : 30 x 15W E14 clear bulb incandescent - 28" x 35" 2097/50 : 50 x 15W E14 clear bulb incandescent - 34.6" x 39.7" Inspiration behind the design: Renowned for his contribution to the modern architectural movement in lighting, creator Gino Sarfatti designed the FLOS 2097 Chandelier in accordance with his legendary utilitarianism and overall desire to create humble yet powerful pieces.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Download

[Mounting instructions](#)



Main specifications

EAN	8059607012673
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Light sources included	No
Lamp category	Incandescent
Lamp type	S
Lamp holders	E12
Number of lamps	30
Power (W)	15

Physical

Color	Matte Black
Length (in)	34.65
Cord color	Black
Cord length (in)	110.236
Canopy color	Black
Canopy height (in)	1.102
Net weight (lb)	11.62
Gross weight (lb)	12.57
Package height (in)	2.95
Package width (in)	10.63
Package length (in)	29.53
Package volume (in)	926.83
IP internal	20




Photometric

Light distribution	Asymmetric
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	60
Main voltage (Vac)	120
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Spare Parts

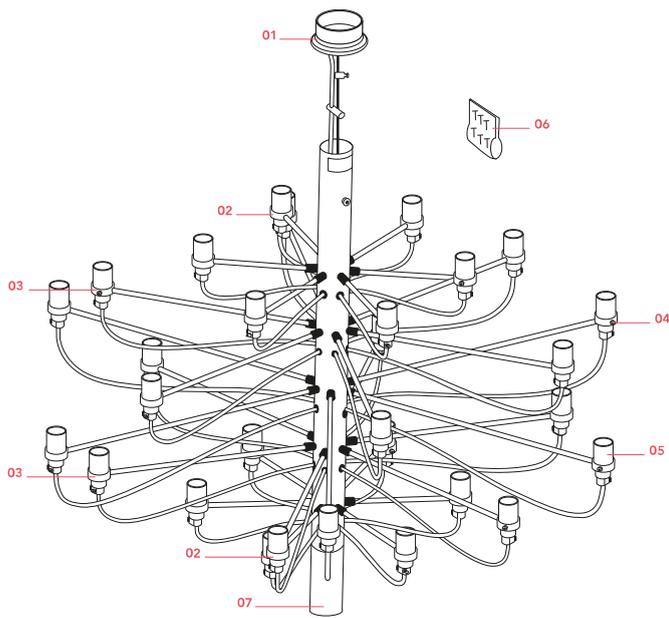

- | | | |
|-----|--|-----------|
| 01. | 2097 Ceiling Rose | RLU706700 |
| 02. | 2097/30 Opal black short arm
(180mm) | RF22385 |
| 03. | 2097/30 Opal black medium arm
(330mm) | RF22388 |
| 04. | 2097/30 Opal black long arm
(430mm) | RF22389 |
| 05. | 2097 E14 lamp holder | RL7050100 |
| 06. | 2097 Opal black screw kit | RF1400100 |
| 07. | 2097/18-30 Opal black lower cap | RF1400200 |



RLU706700
2097 Ceiling Rose



RF22385
2097/30 Opal black short arm
(180mm)



RF22388
2097/30 Opal black medium arm
(330mm)



RF22389
2097/30 Opal black long arm
(430mm)



RL7050100
2097 E14 lamp holder



RF1400100
2097 Opal black screw kit



RF1400200
2097/18-30 Opal black lower cap