

FLOS

FU186233 Argent


Coordinates Suspension 2

Designed by Michael Anastassiades, 2020

55W - 2960lm - 2700K - CRI> 95



Coordinates is a lighting system consisting of horizontal and vertical strip lights that form illuminated grid-like structures of various complexities. This collection of standard chandeliers of pared-down configurations that can be used in any setting. Each suspended element is powered and supported by an invisible electrical and mechanical connection designed specifically to allow for the composition of the four hanging models (S1, S2, S3, S4). The S Module is also available to create semi-custom designs for large-scale installations. Behind the design: This design evolved from a commission for the feature lighting of the main dining area of the historic Four Seasons restaurant in New York City. The restaurant relocated and opened in 2018 with the interiors designed by Sé Paolo-based architect Isay Weinfeld.



Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

EAN	8059607038413
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	55
System flux (lm)	2960

Physical

Color	Argent
Length (in)	69.29
Cord color	Black
Canopy color	Argent
Canopy height (in)	2.795
Net weight (lb)	5.95
Gross weight (lb)	11.9
Package volume (in)	1748.21
IP internal	20

Download

Mounting instructions



PDF

Photometric Files

ULD



ZIP



Photometric


Lighting type	Total
Light distribution	Asymmetric
CCT (K)	2700
CRI>	95
Extreme cut off	No

Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Driver	Integrated
Dimmable	Yes
Dimming type	Dimmable 0-10V, Dimmable 1-10V, Dimmable DALI 1, Dimmable Push
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class F



Replaceable (LED only)
light source by a
professional



Replaceable control
gear by a professional

Accessories & Power Supply




OPTIONAL

RF27318

Push button and cables assembly
for dimmer

Spare Parts

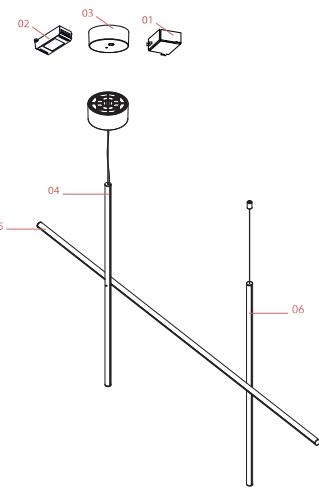

01.	Power supply kit for Arrangements small & Noctambule	RF0410500
02.	Led dimmer kit	RF35452
03.	Assembly Rose for Coordinates Suspension Argent	RF1872133
05.	Coordinates Suspension 2 Rod Assembly 1760 H-21 Argent	RF30929
06.	Coordinates Suspension 2 Rod Assembly L920 S-20 Argent	RF30928



RF0410500

Power supply kit for
Arrangements small &
Noctambule



RF35452

Led dimmer kit



RF1872133

Assembly Rose for Coordinates
Suspension Argent



RF30929

Coordinates Suspension 2 Rod
Assembly 1760 H-21 Argent



RF30928

Coordinates Suspension 2 Rod
Assembly L920 S-20 Argent