

# FLOS

F3176059 Brass

## IC Lights Suspension 2

Designed by Michael Anastassiades, 2014



Halogen - 205W

Suspension lamp providing diffused light. Frame in brass, brushed and transparent varnished or chrome steel. Blown glass opal diffuser.

Are you a professional and your project needs consulting and support?


[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607003442
Mounting	Suspension
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	Halogen
Lamp holders	E27
Ilcos	HSGS
Number of heads	1
Power (W)	205

### Physical

Colour	Brass
Cord length (mm)	2700
Net weight (kg)	2.95
Package volume (m3)	0.1
IP internal	20

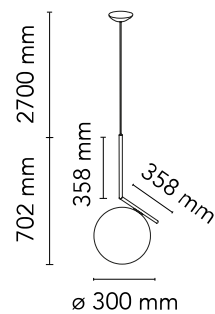

### Download

[Mounting instructions](#) PDF

[Spare Parts](#) PDF

### Photometric Files

[LDT / IES](#) LDT

### Technical Drawings

[2D](#) ZIP


[3D](#) ZIP

[Bim](#) ZIP



	IK 05	IP 20
--	----------	----------

## Schematic light drawing



Luminous flux Luminaire  
1252 lm


### Photometric

Lighting type	Total
Light distribution	Asymmetric

### Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-250
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Remote Dimmable (Dimmer Not Included)
Batteries inside	No
Charging min time	No


## Bulbs



NOT INCLUDED

RF26259

LED Lamp 18W E27 2700K  
Dimmable



NOT INCLUDED

RF26258

LED Lamp 18W E27 3000K T38  
Dimmable



NOT INCLUDED

RF32288

LED Lamp E27 15W 2700K T38




NOT INCLUDED

RF32289

LED Lamp E27 15W 3000K T38

## Spare Parts

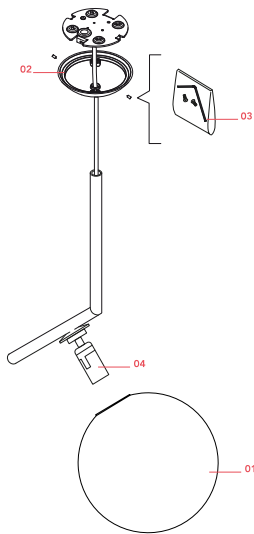

- |     |  |           |
|-----|--|-----------|
| 01. | IC Lights 2 diffuser for brass version | F3137059  |
| 02. | S1/S2 brass ceiling rose assembly      | RF3170359 |
| 03. | Kit with screws and allen key          | RF3160100 |
| 04. | E27 lamp holder assembly               | RF3160200 |

**DOWNLOAD**



F3137059  
IC Lights 2 diffuser for brass  
version



RF3170359  
S1/S2 brass ceiling rose assembly



RF3160100  
Kit with screws and allen key



RF3160200  
E27 lamp holder assembly