

FLOS

F6301046 Aluminized Bronze


KTribe Floor 3

Designed by Philippe Starck, 2007

Halogen - 250W



Floor lamp providing diffused lighting. Base, rod support and diffuser support in die-cast, polished and chrome-plated Zamak alloy. Galvanized P04 steel base cover. Injectionmolded PC (polycarbonate) opal inner diffuser and support for the lamp-holder. Outer diffusers in transparent or fumée PMMA (polymethylmethacrylate), and silver or bronze on the inner surface, by vacuum aluminum coating. Injection-molded PC (polycarbonate) upper ring, completely transparent or transparent diffuser and silver diffuser) or transparent brown for the outer bronze diffuser. On the cable there is the electronic dimmer which allows the regulation of light brightness.

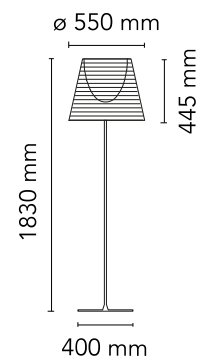

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

Main specifications

Mounting	Floor
Environments	Indoor dry location
Light Source Type	Bulb
Lamp category	Halogen
Lamp holders	E27
Iicos	HSGS
Number of heads	1
Power (W)	250

Physical

Colour	Aluminized Bronze
Length (mm)	550
Net weight (kg)	16
Package volume (m3)	0.73
IP internal	20

Download

Mounting instructions	↓ PDF
Spare Parts	↓ PDF




Photometric

Lighting type	Indirect, Direct
Light distribution	Symmetric
Extreme cut off	No

Electrical

Insulation class	II
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
LED voltage Vf (Vdc)	null
Dimmable	Yes
Dimming interface	Dimmer Integrated
Plug type	Type C
Batteries inside	No

Bulbs



NOT INCLUDED

RF26998

LED 21W E27 2450lm 3000K
DIMMER




NOT INCLUDED

RF30429

LED Opal Lamp E27 21W 2700K
A65 Dimmable

Spare Parts

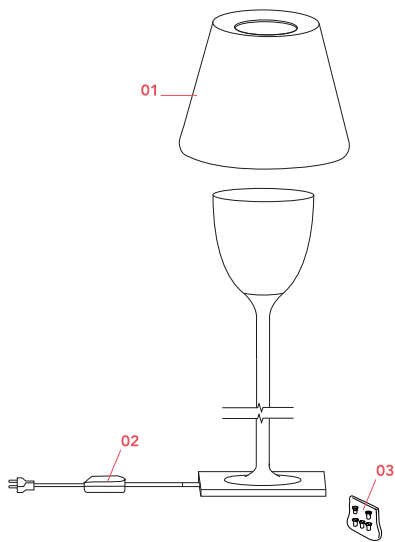

- | | | |
|-----|---|-----------|
| 01. | Aluminized bronze diffuser assembly | F6298046 |
| 02. | Led rondo' dimmer 220/240v 40-250w 4-100w | RF28045 |
| 03. | Kit of 5 white feed pads for base | RF3020100 |

DOWNLOAD



F6298046
Aluminized bronze diffuser
assembly



RF28045
Led rondo' dimmer 220/240v 40-
250w 4-100w



RF3020100
Kit of 5 white feed pads for base