

FLOS


05.6407.14.BS Black

Workmates Suspension Up&Down Tunable White Smart High Efficiency NEW

Designed by FLOS Architectural, 2023



Suspension luminaire. Up&Down emission, with greater light flux amounts in the upper part. Highefficiency Down light source. Tunable White variable CCT Up light source. Driver not included (accessory kit for remote or surface driver). Adjustable suspension height. Smart version with integrated presence detection and brightness sensors. Mechanical union module available for modular lines for various units. UGR<19. EN12464 - cd/m2 @ 65°<3000 compliant. Casambi, maximum distance between fixtures: 50m

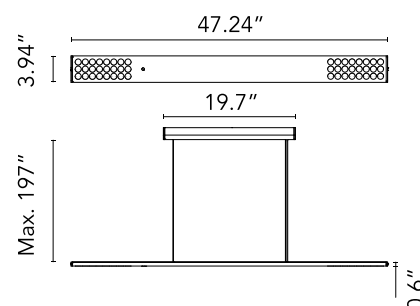

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

Main specifications

Mounting	Suspension
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Lamp category	LED
Number of lamps	1
Power (W)	47.5
System power (W)	61
Source flux (lm)	7818
System flux (lm)	5952

Physical

Color	Black
Orientation	Fixed
Cord color	Black
Net weight (lb)	4.64
IP internal	20

Download

Family spec sheet	ZIP
Mounting instructions	PDF

Photometric Files


LDT / IES	ZIP
-----------	-----

Technical Drawings

2D	ZIP
3D	ZIP



Schematic light drawing



Ecodesign and Energy Labelling

Replaceable (LED only) light source by a professional

Replaceable control gear by a professional

Photometric

Lighting type	Total
Light distribution	Symmetric
CCT (K)	4000
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	89
Rg gamut index	98
LED Life / Failure Ratio	L80B50>60.000h_Tc85°C
Beam angle C0-180 (°)	71
Beam angle C90-270 (°)	81
Extreme cut off	Yes
UGR _L	<16

Electrical

Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable Casambi
Batteries inside	No

Notes

Class 2 Listed

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order to improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Accessories & Power Supply



REQUIRED
Accessory

Installation

08.0910.14.9S

SURF.KIT BK WORKM STEEL WIRE
1C NOPSU UL



REQUIRED
Accessory

Installation

08.0910.40.9S

SURF.KIT WH WORKM STEEL
WIRE 1C NOPSU UL