

# FLOS

09.3800.CZA Bronze

## Find Me 0


Designed by Jorge Herrera, 2018



Accent lighting LED module to be installed in the Zero Track system. Incorporated DC/DC electronic converter. Module non-dimmable. To individually control the lights, select integrated Casambi versions.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



### Main specifications

|                        |                     |
|------------------------|---------------------|
| Mounting               | Track               |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | Power LED           |
| Number of lamps        | 1                   |
| Power (W)              | 3.5                 |
| Source flux (lm)       | 325                 |
| Lumen Output (lm)      | 183                 |
| Efficacy (lm/W)        | 53                  |

### Physical

|                          |            |
|--------------------------|------------|
| Colour                   | Bronze     |
| Trim                     | No         |
| Orientation              | Adjustable |
| Rotation (°)             | 360        |
| Longitudinal tilting (°) | 90         |
| Spot diameter (mm)       | 24         |
| Net weight (kg)          | 0.06       |
| IP internal              | 20         |

### Download

[Mounting instructions](#)  PDF

### Photometric Files

[LDT / IES](#)  ZIP

### Technical Drawings


[2D](#)  ZIP

[3D](#)  ZIP

[Bim](#)  ZIP



## Schematic light drawing



## Photometric


|                          |                          |
|--------------------------|--------------------------|
| Lighting type            | Direct                   |
| Light distribution       | Symmetric                |
| CCT (K)                  | 3000                     |
| CRI>                     | 90                       |
| McAdam steps (SDCM)      | 3                        |
| LED Life / Failure Ratio | L80B50>50.000h (Tc=85°C) |
| Beam angle C0-180 (°)    | 15                       |
| Beam angle C90-270 (°)   | 15                       |
| Extreme cut off          | No                       |
| UGR <sub>L</sub>         | <10                      |

## Electrical

|                     |                 |
|---------------------|-----------------|
| Insulation class    | III             |
| Forward voltage (V) | 24              |
| LED current (mA)    | 250             |
| Power supply        | Remote excluded |
| Dimmable            | No              |
| Power supply type   | Non Dimmable    |

## Ecodesign and Energy

### Labelling

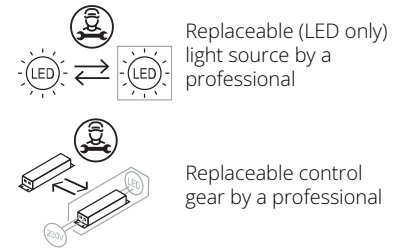

## Notes

Accessories included (honeycomb and screening crosspiece).