

FLOS

09.3922.18A Deep Brown

Find Me 1 Suspension Casambi integrated


Designed by Jorge Herrera, 2020



Accent lighting LED module. Incorporated DC/DC electronic converter. Casambi via Flos Control App to individually control the lights.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

| | |
|------------------------|---------------------|
| Mounting | Track |
| Environments | Indoor dry location |
| Light source type | LED |
| Light sources included | Yes |
| LED type | Power LED |
| Number of lamps | 1 |
| Power (W) | 5.5 |
| Source flux (lm) | 450 |
| Lumen Output (lm) | 309 |
| Efficacy (lm/W) | 57 |

Physical

| | |
|--------------------|------------|
| Colour | Deep Brown |
| Trim | No |
| Orientation | Fixed |
| Spot diameter (mm) | 33 |
| Net weight (kg) | 0.27 |
| IP internal | 20 |

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)



Schematic light drawing



Photometric


| | |
|--------------------------|-----------------------------|
| Lighting type | Direct |
| Light distribution | Symmetric |
| CCT (K) | 2700 |
| CRI> | 90 |
| McAdam steps (SDCM) | 3 |
| LED Life / Failure Ratio | L80B50>50.000h (Tc=85°C) |
| Beam angle C0-180 (°) | 14 |
| Beam angle C90-270 (°) | 14 |
| Extreme cut off | No |
| UGR _L | <10 |

Electrical

| | |
|---------------------|------------------|
| Insulation class | III |
| Forward voltage (V) | 24 |
| LED current (mA) | 400 |
| Power supply | Remote excluded |
| Dimmable | Yes |
| Power supply type | Dimmable Casambi |
| Dimming range (%) | 1-100 |

Ecodesign and Energy

Labelling

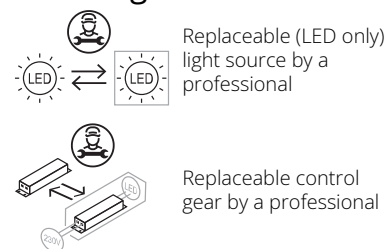

Notes

Accessories included (honeycomb and screening crosspiece). The control system with the Casambi version of light fixtures is directly and individually regulated wirelessly using the application FLOS Control® powered by Casambi.