

FLOS

03.8102.40A1V White

Light Tube Ø 30 Direct 1500 mm Dimmable 1-10V


Designed by Vincent Van Duysen



Diffused LED light module to be installed in The Infra-Structure.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)



Main specifications

Mounting	Track
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	38

Physical

Color	White
Orientation	Fixed
Length (in)	60.79
IP internal	20

Download

- [Family spec sheet](#) ZIP
- [Mounting instructions](#) PDF

Photometric Files


- [LDT / IES](#) ZIP

Technical Drawings

- [2D](#) ZIP
- [3D](#) ZIP



Schematic light drawing



Photometric


Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Beam angle C0-180 (°)	150
Beam angle C90-270 (°)	106

Electrical

Insulation class	III
Forward voltage (V)	48
Driver	Remote
Dimmable	Yes
Dimming type	Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Ecodesign and Energy

Labelling

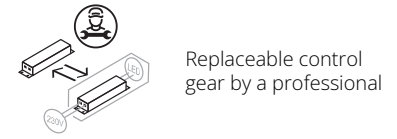

Notes

System turning fastening elements 0°-90° with a magnetic connection and mechanic security bock for a transversally installation between two lines of the profile. The Light Tube are only fed by one od the ends and do not communicate current through the other end. For wireless lighting control, choose integrated Casambi versions.