

FLOS

05.3210.ER.1V Brushed Steel

Magic Stick 100 Asymmetric 1-10V Dimmable


Designed by Jorge Herrera, 2023

9.8W - 587lm - 2700K - CRI> 90 - Beam° 131

LED diffuse and accent lighting module for installation in the Zero Track Pro system. Can be adjusted by rotating from its axis located in an asymmetrical position. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

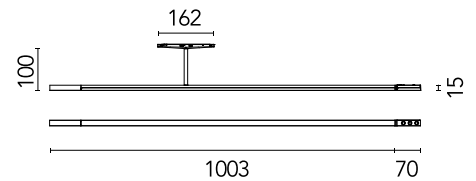

Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	9.8
System power (W)	12
Source flux (lm)	1160
Lumen Output (lm)	587

Physical

Colour	Brushed Steel
Rotation (°)	360
Net weight (kg)	0.49
IP internal	20
IP external	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)


Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	89
Rg gamut index	96
LED Life / Failure Ratio	L80B10>50.000h_Tc65°C
Beam angle C0-180 (°)	131
Beam angle C90-270 (°)	112
Extreme cut off	No

Electrical

Insulation class	III
Forward voltage (V)	24
LED current (mA)	750
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Dimmable 1-10V
Dimming interface	Remote Dimmable (Dimmer Not Included)

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class G

