

# FLOS


05.3230.14.DA Black

## Magic Stick 145 Asymmetric Dali Dimmable

Designed by Jorge Herrera, 2023

9.8W - 587lm - 2700K - CRI> 90 - Beam° 131

LED diffuse and accent lighting module for installation in the Zero Track Pro system. Can be adjusted by rotating from its axis located in an asymmetrical position. Electronic DC/DC converter incorporated. Individual control via DALI protocol and broadcast mode via 1-10V.

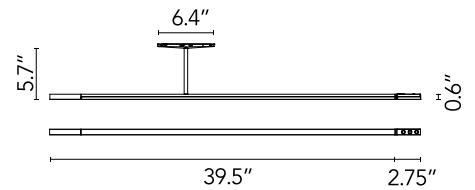

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

### Main specifications

Mounting	Track
Environments	Indoor dry location
Light Source Type	LED
Light sources included	Yes
LED type	Top LED
Number of lamps	1
Power (W)	9.8
System power (W)	12
Source flux (lm)	1160
System flux (lm)	587

### Physical

Color	Black
Rotation (°)	360
IP internal	20

### Download

Family spec sheet [↓ ZIP](#)  
Mounting instructions [↓ PDF](#)

### Photometric Files


LDT / IES [↓ ZIP](#)

### Technical Drawings

2D [↓ ZIP](#)  
3D [↓ ZIP](#)



## Schematic light drawing



## Photometric

Lighting type	Direct
Light distribution	Asymmetric
CCT (K)	2700
CRI>	90
Rf fidelity index	89
Rg gamut index	96
LED Life / Failure Ratio	L80B10>50.000h_Tc65°C
Beam angle C0-180 (°)	131
Beam angle C90-270 (°)	112

## Electrical

Insulation class	III
Forward voltage (V)	24
LED current (mA)	750
Driver	Remote excluded
Dimmable	Yes
Dimming type	Dimmable DALI 2
Dimming interface	Remote Dimmable (Dimmer Not Included)

## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class G

