

FLOS

05.3562.40A White

Multi Spot Mini

Designed by FLOS Architectural, 2025




LED - Power LED - 6.1W - 433lm - 2700K - CRI> 90 - Beam° 19

LED lighting module with 12 spotlights and low glare, to be installed in The Glowing Track System.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

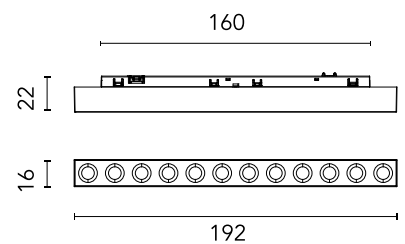

Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	6.1
System power (W)	6.5
Source flux (lm)	662
Lumen Output (lm)	433
Efficacy (lm/W)	67

Physical

Colour	White
Orientation	Fixed
Length (mm)	192
Canopy height (mm)	0
Net weight (kg)	0.1
Package height (mm)	6
Package width (mm)	25
Package length (mm)	7
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings


2D [↓ ZIP](#)

3D [↓ ZIP](#)




Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class G



Schematic light drawing



Beam Angle: 19°

h(m)	E(lx)	D(m)
1	2895	0.33
2	724	0.66
3	322	0.99
4	181	1.32
5	116	1.65

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	91
Rg gamut index	100
LED Life / Failure Ratio	L90B50>59.000h_Tc85°C
Beam angle C0-180 (°)	19
Beam angle C90-270 (°)	19
Extreme cut off	Yes
UGR _L	<10

Electrical

Insulation class	III
Frequency (Hz)	0
LED current (mA)	150
Power supply	Remote
Dimmable	No
Power supply type	Non Dimmable
Batteries inside	No