

FLOS

05.3565.40A White

Multi Spot Mini

Designed by FLOS Architectural, 2025




LED - Power LED - 6.1W - 408lm - 3000K - CRI> 90 - Beam° 31

LED lighting module with 12 spotlights and low glare, to be installed in The Glowing Track System.

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

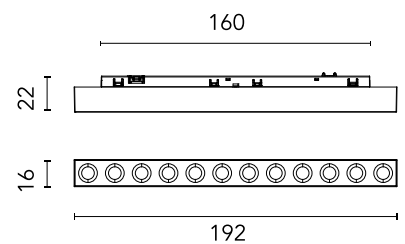

Main specifications

Mounting	Track
Environments	Indoor dry location
Light source type	LED
Light sources included	yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	6.1
System power (W)	6.5
Source flux (lm)	673
Lumen Output (lm)	408
Efficacy (lm/W)	63

Physical

Colour	White
Orientation	Fixed
Length (mm)	192
Canopy height (mm)	0
Net weight (kg)	0.1
Package height (mm)	6
Package width (mm)	25
Package length (mm)	7
IP internal	20

Download

Mounting instructions [↓ PDF](#)

Photometric Files

LDT / IES [↓ ZIP](#)

Technical Drawings

2D [↓ ZIP](#)

3D [↓ ZIP](#)




Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class G



Schematic light drawing



Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	3000
CRI>	90
McAdam steps (SDCM)	3
Rf fidelity index	91
Rg gamut index	101
LED Life / Failure Ratio	L90B50>59.000h_Tc85°C
Beam angle C0-180 (°)	31
Beam angle C90-270 (°)	31
Extreme cut off	Yes
UGR _L	<16

Electrical

Insulation class	III
Frequency (Hz)	0
LED current (mA)	150
Power supply	Remote
Dimmable	No
Power supply type	Non Dimmable
Batteries inside	No